



# **Radio Frequency Exposure**

## **RF Safety and NIER Analysis Report**

**11/17/2023**

**Site: TUMALT  
Cascade Locks, OR  
Prepared for: Verizon**

## Table of Contents

|     |                                                                     |    |
|-----|---------------------------------------------------------------------|----|
| 1   | Certification .....                                                 | 3  |
| 2   | Executive Summary .....                                             | 4  |
| 2.1 | Conclusion and Recommendations .....                                | 5  |
| 3   | Introduction .....                                                  | 6  |
| 3.1 | Site Description: .....                                             | 6  |
| 3.2 | Site Configuration Being Modeled .....                              | 7  |
| 4   | Predictive Analysis Details .....                                   | 8  |
| 4.1 | Analysis Locations: .....                                           | 8  |
| 4.2 | Antenna Inventory .....                                             | 9  |
| 4.3 | RF Emissions Diagram(s) - All Transmitters .....                    | 10 |
| 4.4 | RF Emissions Diagram(s) - Verizon Transmitters Only .....           | 12 |
| 5   | Signage/ Mitigation .....                                           | 15 |
| 5.1 | Signage/ Barrier Detail .....                                       | 15 |
| 5.2 | Signage/ Barrier Diagram .....                                      | 16 |
| 6   | Conclusions and Recommendations .....                               | 17 |
| 7   | Appendix A: FCC Compliance and RF Safety Policies .....             | 18 |
| 8   | Appendix B: Overview of RoofMaster® Functions and Assumptions ..... | 20 |
| 9   | References .....                                                    | 23 |
| 10  | Limited Warranty .....                                              | 24 |

# 1 Certification

This report, prepared by Pramira, Inc. for **Verizon**, is intended to document compliance and evaluate power density levels as outlined in the report. The computations, analysis, and resulting report and conclusions were based on applicable FCC guidelines and regulations for maximum permissible exposure to humans consistent with FCC OET Bulletin 65, Edition 97-01.

Additionally, Pramira, Inc. certifies that the assumptions are valid and that the data used within Pramira control are accurate, including information collected as part of Pramira field surveys. Pramira, Inc. does not, however, certify the accuracy or correctness of any data provided to Pramira, Inc. for this analysis and report by Verizon or other third parties working on behalf of Verizon.

I certify that the attached RF exposure analysis and report is correct to the best of my knowledge, and all calculations, assumptions and conclusions are based on generally acceptable engineering practices:



SIGNED, 17 NOV 2023

EXPIRES, 31 DEC 2023

Tim Alexander, PE

Digitally signed by Tim Alexander, PE  
DN: cn=Tim Alexander, PE, o=Proteus Power  
Engineering, ou,  
email=proteuspower@outlook.com, c=US  
Date: 2023.11.17 11:41:52 -0700

Tim Alexander, P.E.

**Report Prepared by:** Abdelsalam Masoud, 11/17/2023

**Report Reviewed by:** Mike Arnold, 11/17/2023

## 2 Executive Summary

This report provides the results of an RF power density analysis performed for **Verizon** at site **TUMALT** in accordance with the Federal Communications Commission (FCC) rules and regulations for RF emissions described in OET Bulletin 65, Edition 97-01.

This report addresses RF safety for two classified groups defined by OET Bulletin 65: Occupational/ Controlled and General Population/ Uncontrolled. Based on the analysis, this site will be **Compliant** with FCC rules and regulations and Verizon's Signage and Barrier Policy if the mitigation details provided in Table 1 are implemented.

| Final Compliant Configuration |  |  |  |  |  |  |
|-------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                               | GUIDELINES                                                                        | NOTICE                                                                            | CAUTION                                                                           | WARNING                                                                            | NOC INFO                                                                            | BARRIER/MARKER                                                                      |
| Access Point(s)               | <input checked="" type="checkbox"/> [1]*                                          | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                       | <input checked="" type="checkbox"/> [1]*                                            | <input type="checkbox"/> [ ]                                                        |
| Alpha                         | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                       | <input type="checkbox"/> [ ]                                                        | <input type="checkbox"/> [ ]                                                        |
| Beta                          | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                       | <input type="checkbox"/> [ ]                                                        | <input type="checkbox"/> [ ]                                                        |
| Gamma                         | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                       | <input type="checkbox"/> [ ]                                                        | <input type="checkbox"/> [ ]                                                        |

**NOTE:** The table represents either the signage/barriers installed / removed OR items required by the market (if mitigation is not installed by consultant/vendor).

\*These RF signs should be posted at the Access Gate to the site. (See drawing in Section 4b).

### Specialty Sign Detail

|              |     |
|--------------|-----|
| Location     | N/A |
| Access Point | N/A |
| Alpha        | N/A |
| Beta         | N/A |
| Gamma        | N/A |

**NOTE:** The tables above represent EXISTING compliance items implemented at this location.

|                                                          |
|----------------------------------------------------------|
| <b>Notes/ Additional Compliance Requirements(s):</b>     |
| Mitigation is required per the Signage/ Barrier Diagram. |

**Table 1: Mitigation Requirements for Compliance**

## **2.1 Conclusion and Recommendations**

- The results of the analysis indicate that the power density levels in the generally accessible areas on the **C-Band Antenna Level** will not exceed the FCC's MPE limit for General Population and Occupational limit. Notice that the power density levels will not exceed the FCC's MPE limit in front of the antennas which are not generally accessible areas.
- The results of the analysis indicate that the power density levels in the generally accessible areas on the **Ground Level** will not exceed the FCC's MPE limit for General Population limits.
- The max theoretical % MPE (General Public) is **8175.18%** directly in front of the antennas beams at the **C-Band Antenna Level**. Notice that the power density levels will exceed the FCC's MPE limit for General Population limits in front of the antennas which are not generally accessible areas.

NOC and Guidelines signs need to be posted at the Access Gate to the site. All access points to these areas need to remain locked at all times.

*Note: Modifications to the site; and/or increases in channel counts or power levels exceeding those listed in this report will require additional evaluation to determine compliance.*

### 3 Introduction

The purpose of this analysis and report is to evaluate the cumulative power density levels of all non-excluded antennas located on the site and identify any areas of concern that require mitigation. This report also assesses the site's compliance with FCC OET Bulletin 65; "Guidelines for Human Exposure to Radio-frequency Electromagnetic Fields".

The power density simulation performed for this site utilized RoofMaster® analysis software. All antennas were assigned an operating frequency and transmit power and were deemed to be operating at 100% of their rated output power. 1047 Randy Drive

#### 3.1 *Site Description:*

- **Site Name:** TUMALT
- **Street Address:** 11499 NE MCLOUGHLIN PKWY  
Cascade Locks, OR 97014
- **Latitude:** 45° 36' 15.1812" N
- **Longitude:** 122° 2' 4.5096" W
- **Structure Type:** Monopine
- **Structure Height:** ± 135' AGL
- **Co-Locators/ Other Antennas:** CD shows Co-Locator antennas. Since no co-locator data was provided, a general antenna configuration was used modeling the Unknown carriers. However, until those details can be confirmed in the Post analysis, (Unknown) was used as an identifier in the report. C/Ls were estimated from the CDs.
- **BTS Equipment Location:** The Verizon equipment is located on the Ground.

### ***3.2 Site Configuration Being Modeled***

- This is a Monopine Standard application where Verizon antennas are mounted on the Monopine.
- This is a Three-Sector site supporting LTE at 700, 1900, and 2100 MHz, and C-Band at 3700 MHz for all sectors. All LTE assumes 4x4 MIMO.
- The values of antennas rad center of C-Band (132.7'), LTE (130'), are based on the CDs and Google Earth. These values must be verified on the site audit for the post study.
- All technologies were evaluated assuming the max number of channels and were running at max power 100% of the time.

## **4 Predictive Analysis Details**

For purposes of this analysis, RoofMaster® was configured to provide an output based on the appropriate MPE limit(s) published in the FCC's guidelines. The antenna information was loaded into RoofMaster®, an MPE predictive analysis tool by Waterford Consultants, LLC.

### ***4.1 Analysis Locations:***

**Number of Elevations Analyzed: 3**

- C-Band Antenna level.
- Ground level.
- Pole Elevation Level.

## 4.2 Antenna Inventory

The following table contains the technical data used to simulate the power density that may be encountered with all antennas simultaneously operating at full rated power with the exception of any excluded antennas cited in this document. If co-locator's antennas exist and specific antenna details could not be secured, generic antennas, frequencies, and transmit powers were used for modeling. The assumptions used are based on past experience with communications carriers.


| ID            | Name   | (MHz) Freq | Trans Power | Trans Count | Other Loss | Calc Power | Power EIRP | MD-Tilt (Deg) | Mfg      | Model      | Elevation Z (ft) | (C-Band) Antenna Z (ft) | Ground Z (ft) | Type  | (ft) Aper | dBd Gain | BWdth | Orientation |
|---------------|--------|------------|-------------|-------------|------------|------------|------------|---------------|----------|------------|------------------|-------------------------|---------------|-------|-----------|----------|-------|-------------|
| VZ Alpha_Ant1 | C-Band | 3700       | 5.0         | 64          | 0.0        | 320.0      | 118849     | 2             | ERICSSON | AIR6449    | Various          | 0                       | 132.7         | Panel | 2.8       | 23.55    | 11    | 60          |
| VZ Alpha_Ant2 | L700   | 700        | 40.0        | 2           | 0.5        | 71.3       | 6083       | 2             | JMA      | MX06FRO840 | Various          | -2.7                    | 130.0         | Panel | 8.0       | 15.40    | 40    | 60          |
| VZ Alpha_Ant2 | L1900  | 1900       | 40.0        | 4           | 0.5        | 142.6      | 11193      | 2             | JMA      | MX06FRO840 | Various          | -2.7                    | 130.0         | Panel | 8.0       | 16.80    | 44    | 60          |
| VZ Alpha_Ant3 | L700   | 700        | 40.0        | 2           | 0.5        | 71.3       | 4056       | 2             | JMA      | MX06FRO840 | Various          | -2.7                    | 130.0         | Panel | 8.0       | 15.40    | 40    | 60          |
| VZ Alpha_Ant3 | L2100  | 2100       | 60.0        | 4           | 0.5        | 213.9      | 20187      | 2             | JMA      | MX06FRO840 | Various          | -2.7                    | 130.0         | Panel | 8.0       | 17.60    | 40    | 60          |
| VZBeta_Ant1   | C-Band | 3700       | 5.0         | 64          | 0.0        | 320.0      | 118849     | 2             | ERICSSON | AIR6449    | Various          | 0                       | 132.7         | Panel | 2.8       | 23.55    | 11    | 250         |
| VZBeta_Ant2   | L700   | 700        | 40.0        | 2           | 0.5        | 71.3       | 6083       | 2             | JMA      | MX06FRO840 | Various          | -2.7                    | 130.0         | Panel | 8.0       | 15.40    | 40    | 250         |
| VZBeta_Ant2   | L1900  | 1900       | 40.0        | 4           | 0.5        | 142.6      | 11193      | 2             | JMA      | MX06FRO840 | Various          | -2.7                    | 130.0         | Panel | 8.0       | 16.80    | 44    | 250         |
| VZBeta_Ant3   | L700   | 700        | 40.0        | 2           | 0.5        | 71.3       | 4056       | 2             | JMA      | MX06FRO840 | Various          | -2.7                    | 130.0         | Panel | 8.0       | 15.40    | 40    | 250         |
| VZBeta_Ant3   | L2100  | 2100       | 60.0        | 4           | 0.5        | 213.9      | 20187      | 2             | JMA      | MX06FRO840 | Various          | -2.7                    | 130.0         | Panel | 8.0       | 17.60    | 40    | 250         |
| VZGamma_Ant1  | C-Band | 3700       | 5.0         | 64          | 0.0        | 320.0      | 118849     | 2             | ERICSSON | AIR6449    | Various          | 0                       | 132.7         | Panel | 2.8       | 23.55    | 11    | 335         |
| VZGamma_Ant2  | L700   | 700        | 40.0        | 2           | 0.5        | 71.3       | 4257       | 2             | JMA      | MX06FRO860 | Various          | -2.7                    | 130.0         | Panel | 8.0       | 13.85    | 56    | 335         |
| VZGamma_Ant2  | L1900  | 1900       | 40.0        | 4           | 0.5        | 142.6      | 11065      | 2             | JMA      | MX06FRO860 | Various          | -2.7                    | 130.0         | Panel | 8.0       | 16.75    | 57    | 335         |
| VZGamma_Ant3  | L700   | 700        | 40.0        | 2           | 0.5        | 71.3       | 4257       | 2             | JMA      | MX06FRO860 | Various          | -2.7                    | 130.0         | Panel | 8.0       | 13.85    | 56    | 335         |
| VZGamma_Ant3  | L2100  | 2100       | 60.0        | 4           | 0.5        | 213.9      | 14457      | 2             | JMA      | MX06FRO860 | Various          | -2.7                    | 130.0         | Panel | 8.0       | 16.15    | 53    | 335         |
| Unknown_Ant1  | L700   | 700        | 40.0        | 4           | 0.5        | 142.6      | 6111       | 0             | Unknown  | Unknown    | Various          | -17.7                   | 115.0         | Panel | 8.0       | 14.17    | 47    | 60          |
| Unknown_Ant2  | L1900  | 1900       | 80.0        | 2           | 0.5        | 142.6      | 13740      | 0             | Unknown  | Unknown    | Various          | -17.7                   | 115.0         | Panel | 8.0       | 17.69    | 42    | 60          |
| Unknown_Ant3  | L700   | 700        | 40.0        | 4           | 0.5        | 142.6      | 6111       | 0             | Unknown  | Unknown    | Various          | -17.7                   | 115.0         | Panel | 8.0       | 14.17    | 47    | 250         |
| Unknown_Ant4  | L1900  | 1900       | 80.0        | 2           | 0.5        | 142.6      | 13740      | 0             | Unknown  | Unknown    | Various          | -17.7                   | 115.0         | Panel | 8.0       | 17.69    | 42    | 250         |
| Unknown_Ant5  | L700   | 700        | 40.0        | 4           | 0.5        | 142.6      | 6111       | 0             | Unknown  | Unknown    | Various          | -17.7                   | 115.0         | Panel | 8.0       | 14.17    | 47    | 335         |
| Unknown_Ant6  | L1900  | 1900       | 80.0        | 2           | 0.5        | 142.6      | 13740      | 0             | Unknown  | Unknown    | Various          | -17.7                   | 115.0         | Panel | 8.0       | 17.69    | 42    | 335         |
| Unknown_Ant7  | L700   | 700        | 40.0        | 4           | 0.5        | 142.6      | 6111       | 0             | Unknown  | Unknown    | Various          | -22.7                   | 110.0         | Panel | 8.0       | 14.17    | 47    | 60          |
| Unknown_Ant8  | L1900  | 1900       | 80.0        | 2           | 0.5        | 142.6      | 13740      | 0             | Unknown  | Unknown    | Various          | -22.7                   | 110.0         | Panel | 8.0       | 17.69    | 42    | 60          |
| Unknown_Ant9  | L700   | 700        | 40.0        | 4           | 0.5        | 142.6      | 6111       | 0             | Unknown  | Unknown    | Various          | -22.7                   | 110.0         | Panel | 8.0       | 14.17    | 47    | 250         |
| Unknown_Ant10 | L1900  | 1900       | 80.0        | 2           | 0.5        | 142.6      | 13740      | 0             | Unknown  | Unknown    | Various          | -22.7                   | 110.0         | Panel | 8.0       | 17.69    | 42    | 250         |
| Unknown_Ant11 | L700   | 700        | 40.0        | 4           | 0.5        | 142.6      | 6111       | 0             | Unknown  | Unknown    | Various          | -22.7                   | 110.0         | Panel | 8.0       | 14.17    | 47    | 335         |
| Unknown_Ant12 | L1900  | 1900       | 80.0        | 2           | 0.5        | 142.6      | 13740      | 0             | Unknown  | Unknown    | Various          | -22.7                   | 110.0         | Panel | 8.0       | 17.69    | 42    | 335         |

The antenna Z-heights listed above are referenced to Pole Elevation C-Band Antenna and Ground Levels.


### 4.3 RF Emissions Diagram(s) - All Transmitters

The following Diagram(s) represent the theoretical spatially averaged Maximum Permissible Exposure (MPE) percentages that are expected for each study's elevation. An additional 1% Occupational MPE Limit (5% General Population MPE limit) is included to demonstrate where Verizon is a significant contributor to the accessible areas where multiple carriers' transmitters may be present.

#### Reference Plane: C-Band Antenna Level

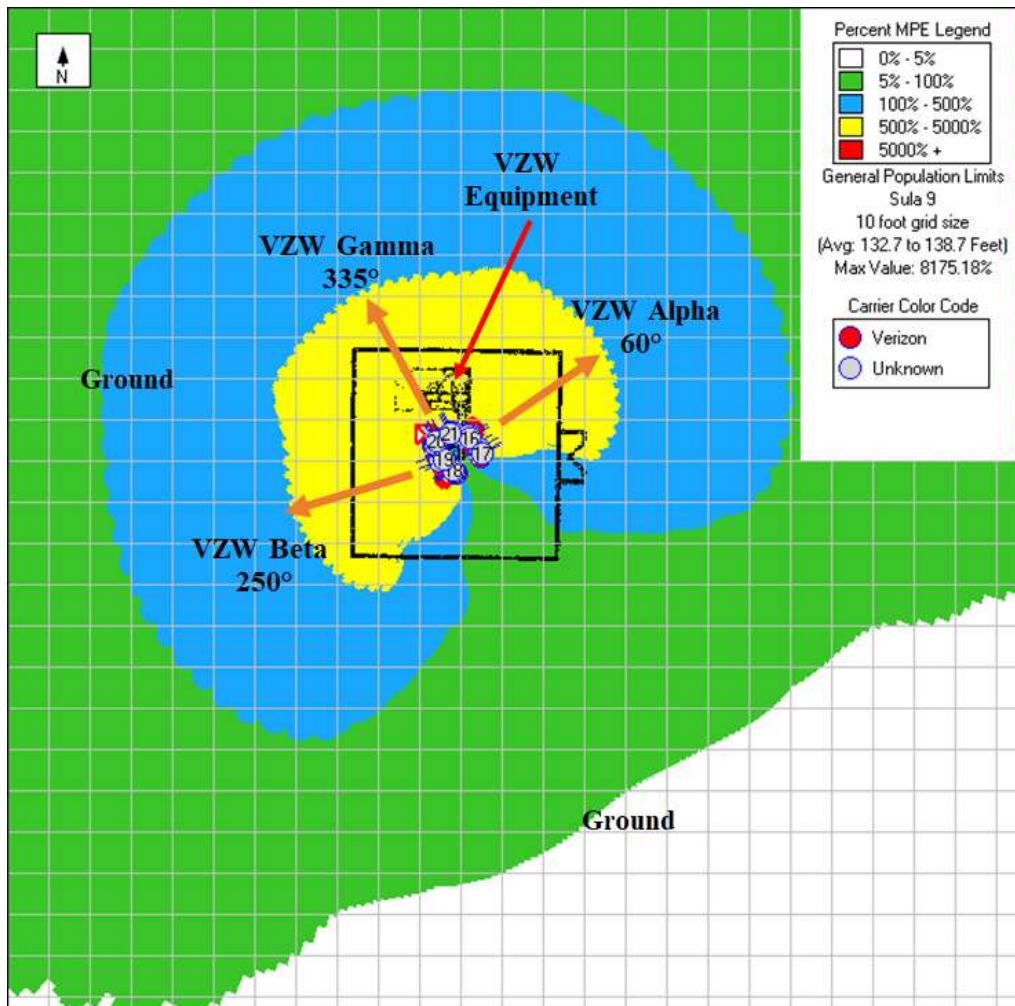


## Reference Plane: Ground Level

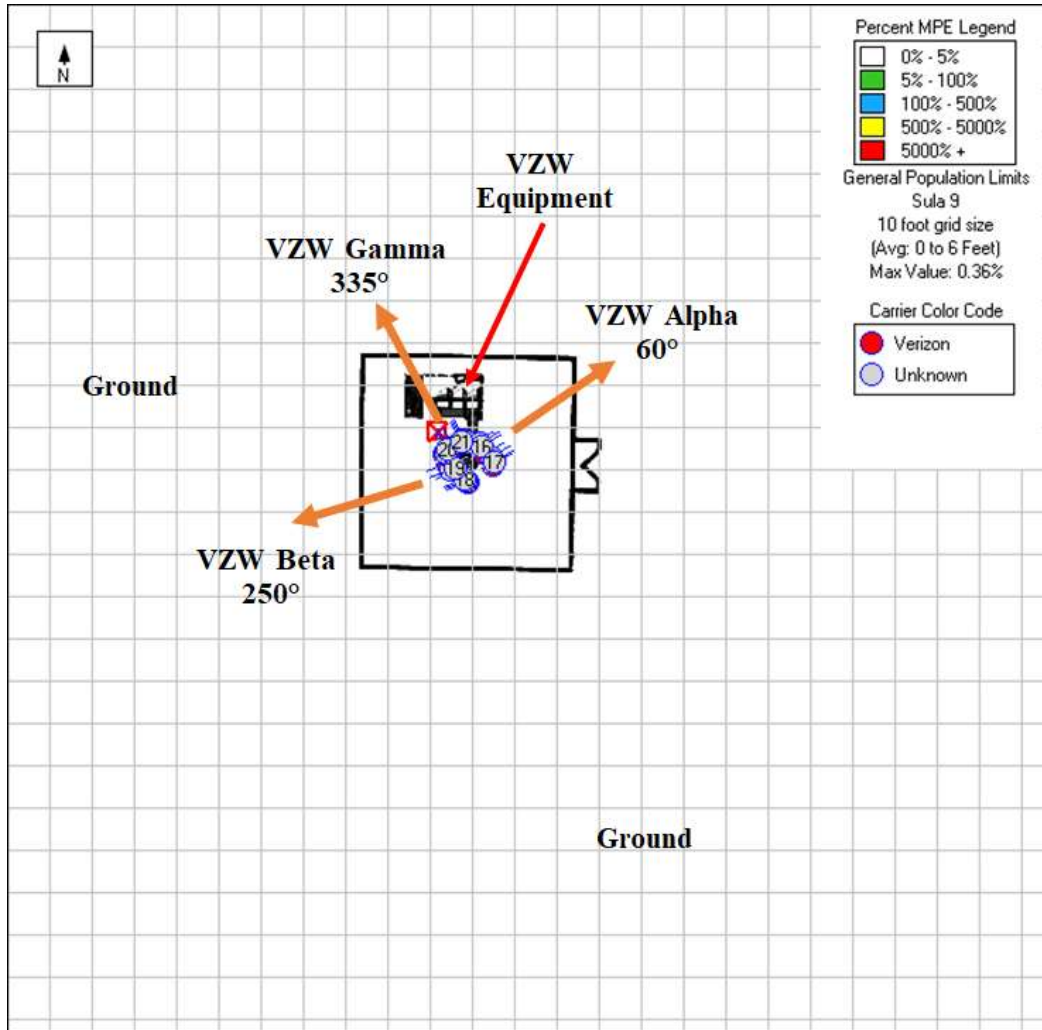


#### 4.4 RF Emissions Diagram(s) - Verizon Transmitters *Only*

The following Diagram(s) represent the theoretical spatially averaged Maximum Permissible Exposure (MPE) percentages that are expected for each study's elevation. An additional 1% Occupational MPE Limit (5% General Population MPE limit) is included to demonstrate where Verizon is a significant contributor to the accessible areas where multiple carriers' transmitters may be present.


##### Reference Plane: C-Band Antenna Level

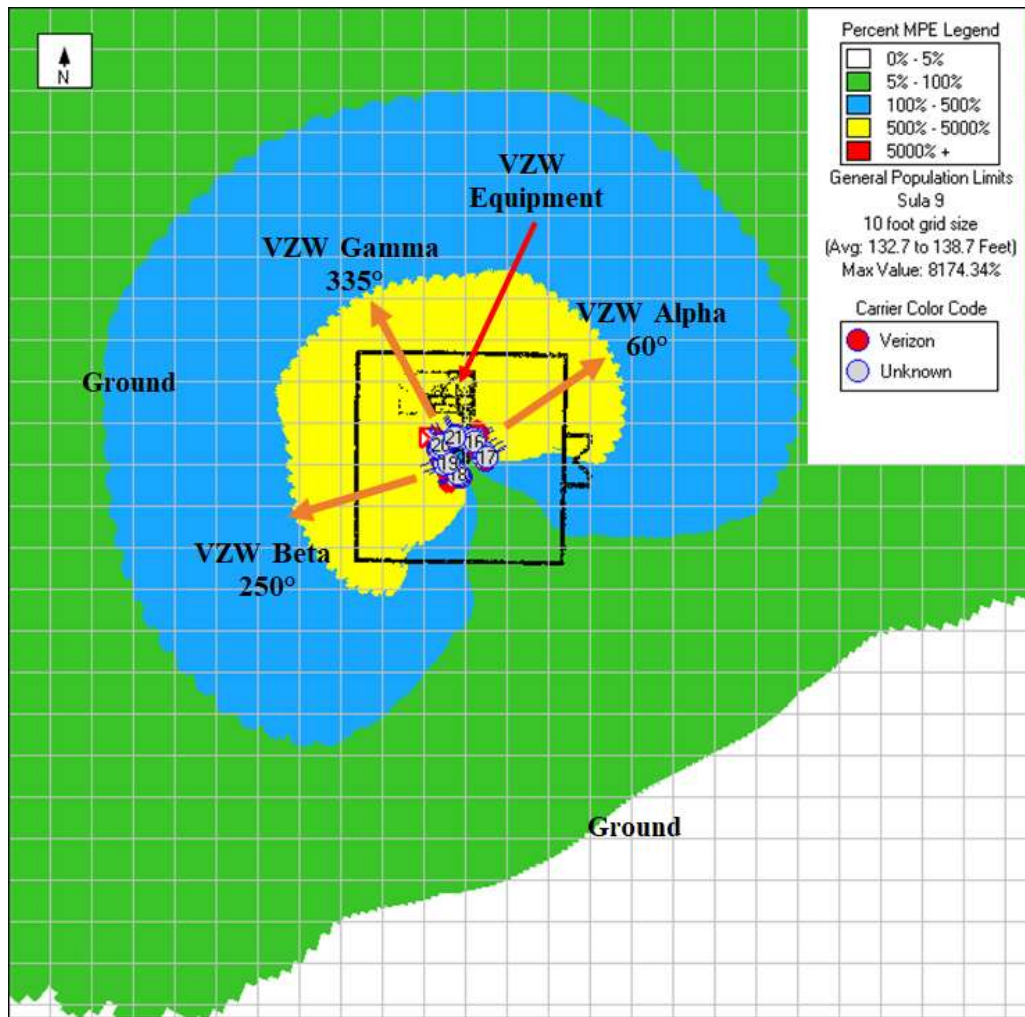

## Reference Plane: Ground Level

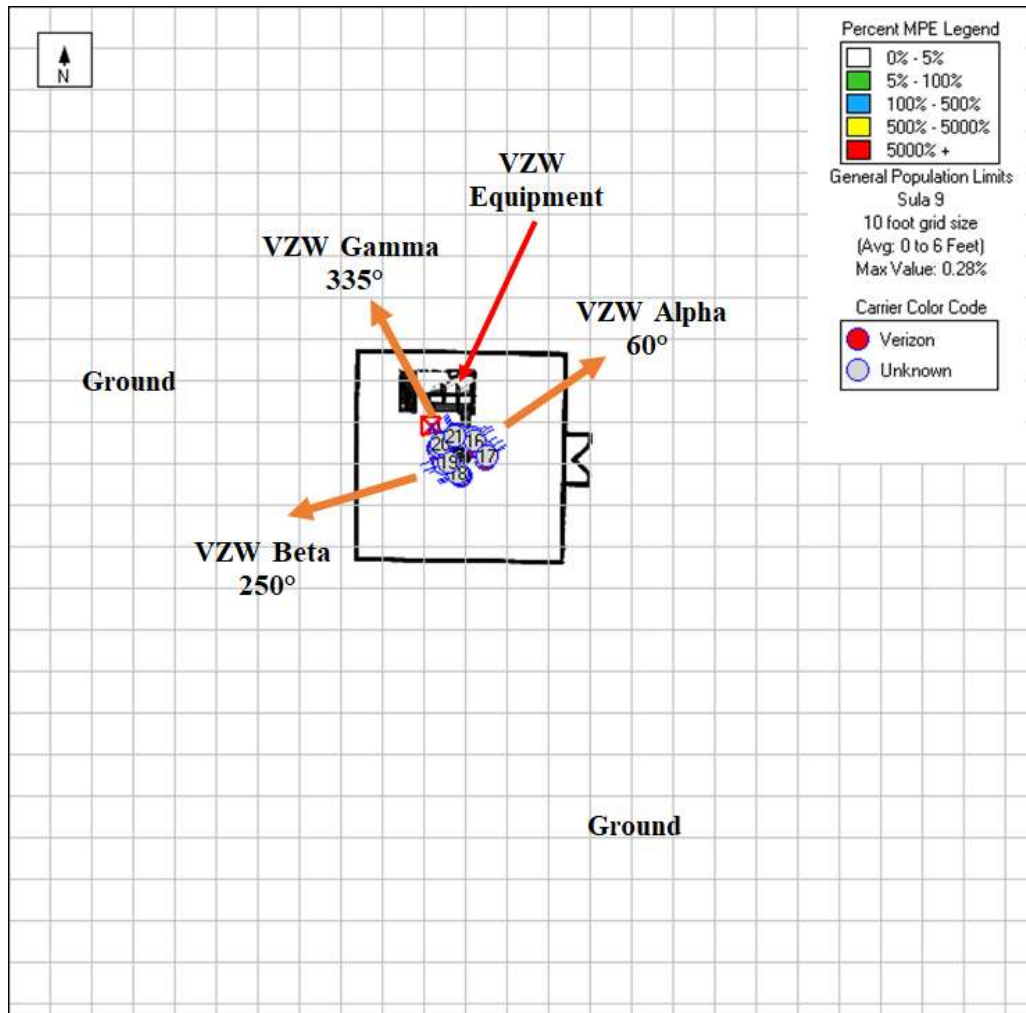

## Reference Plane: Elevation Level

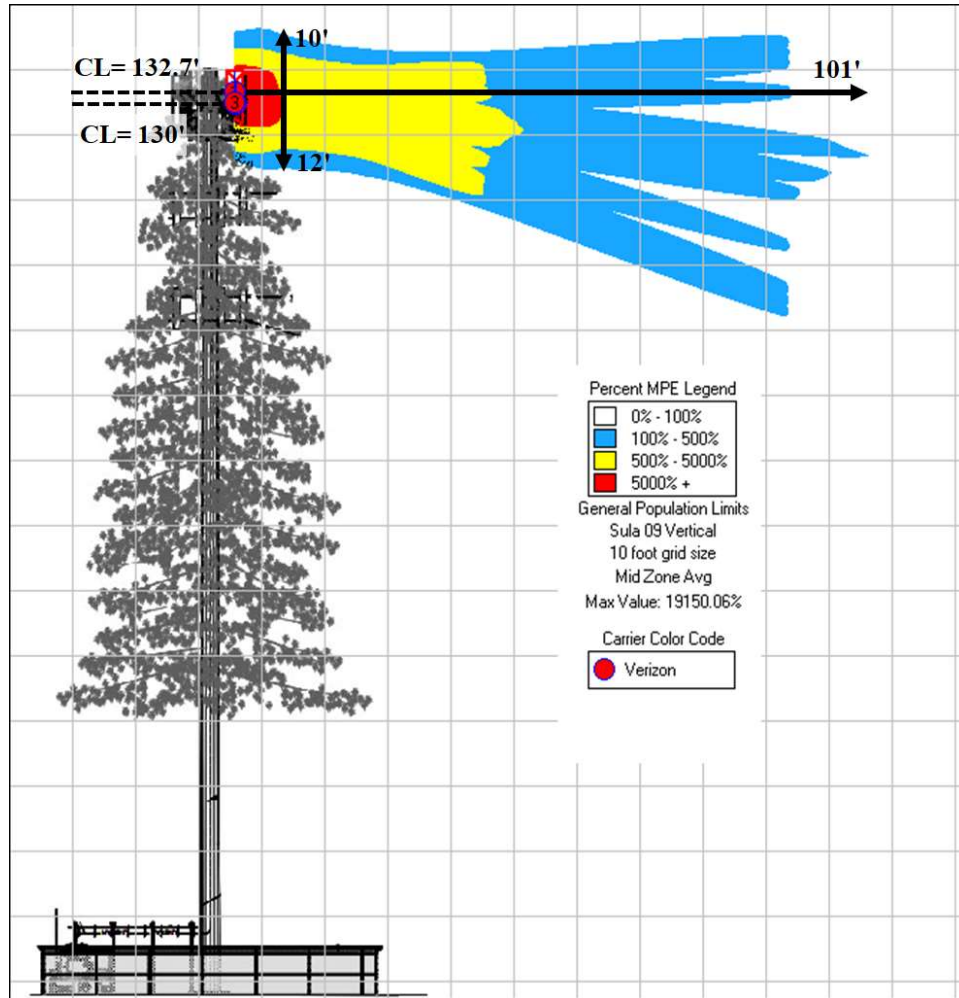

## 5 Signage/ Mitigation

### 5.1 Signage/ Barrier Detail

| Final Compliant Configuration |  |  |  |  |  |  |
|-------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                               | GUIDELINES                                                                        | NOTICE                                                                            | CAUTION                                                                           | WARNING                                                                            | NOC INFO                                                                            | BARRIER/MARKER                                                                      |
| Access Point(s)               | <input checked="" type="checkbox"/> [1] *                                         | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                       | <input checked="" type="checkbox"/> [1] *                                           | <input type="checkbox"/> [ ]                                                        |
| Alpha                         | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                       | <input type="checkbox"/> [ ]                                                        | <input type="checkbox"/> [ ]                                                        |
| Beta                          | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                       | <input type="checkbox"/> [ ]                                                        | <input type="checkbox"/> [ ]                                                        |
| Gamma                         | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                      | <input type="checkbox"/> [ ]                                                       | <input type="checkbox"/> [ ]                                                        | <input type="checkbox"/> [ ]                                                        |

NOTE: The table represents either the signage/barriers installed / removed OR items required by the market (if mitigation is not installed by consultant/vendor).

\*These RF signs should be posted at the Access Gate to the site. (See drawing in Section 4b).

#### Specialty Sign Detail


| Location     | N/A |
|--------------|-----|
| Access Point | N/A |
| Alpha        | N/A |
| Beta         | N/A |
| Gamma        | N/A |

NOTE: The tables above represent EXISTING compliance items implemented at this location.

| Notes/ Additional Compliance Requirements(s):            |
|----------------------------------------------------------|
| Mitigation is required per the Signage/ Barrier Diagram. |

Table 2: Mitigation Requirements for Compliance

## 5.2 Signage/ Barrier Diagram

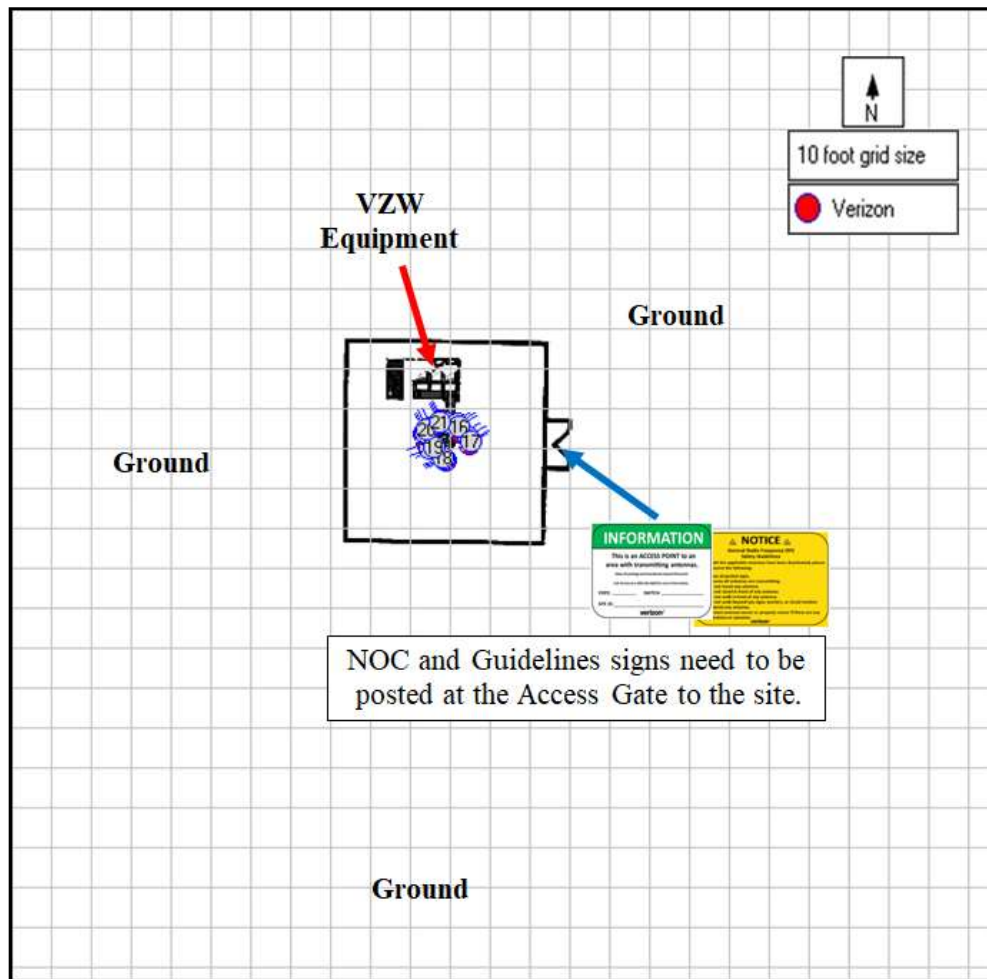

## 6 Conclusions and Recommendations

- The results of the analysis indicate that the power density levels in the generally accessible areas on the **C-Band Antenna** Level will not exceed the FCC's MPE limit for General Population and Occupational limit. Notice that the power density levels will not exceed the FCC's MPE limit in front of the antennas which are not generally accessible areas.
- The results of the analysis indicate that the power density levels in the generally accessible areas on the **Ground** Level will not exceed the FCC's MPE limit for General Population limits.
- The max theoretical % MPE (General Public) is **8175.18%** directly in front of the antennas beams at the **C-Band Antenna** Level. Notice that the power density levels will exceed the FCC's MPE limit for General Population limits in front of the antennas which are not generally accessible areas.

NOC and Guidelines signs need to be posted at the Access Gate to the site. All access points to these areas need to remain locked at all times.

*Note: Modifications to the site; and/or increases in channel counts or power levels exceeding those listed in this report will require additional evaluation to determine compliance.*

## 7 Appendix A: FCC Compliance and RF Safety Policies

In August of 1997, the FCC published OET Bulletin 65 Edition 97-01 to regulate methods for evaluating compliance with FCC guidelines for human exposure to radiofrequency (RF) electromagnetic fields. The FCC guidelines for human exposure to RF electromagnetic fields incorporate two categories of limits; namely “Controlled” (a.k.a. Occupational) and “Uncontrolled” (a.k.a. General Public). The guidelines offer suggested methods for evaluating fixed RF transmitters to ensure that the controlled and uncontrolled limits deemed safe by the FC for human exposure are not exceeded.

OET Bulletin 65 recommended guidelines are intended to allow an applicant to “make a reasonably quick determination as to whether a proposed facility is in compliance with the limits.” In addition, the guidelines offer alternate supplementary considerations and procedures such as field measurements and more detailed analysis that should be used for multiple emitter situations.

These guidelines define RF as emissions in the frequency range of 300 kHz to 100 GHz. The FCC define Maximum Permissible Exposure (MPE) limits within this frequency range based on limits recommended by the National Council on Radiation Protection and Measurement, the Institute of Electrical and Electronics Engineers (IEEE), and by the American National Standards Institute (ANSI).

The specific MPE limits defined by the FCC are as follows:

| Limits for Occupational/Controlled Exposure |                                   |                                   |                                         |                                            |
|---------------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------------|--------------------------------------------|
| Frequency Range [MHz]                       | Electric Field Strength (E) [V/m] | Magnetic Field Strength (H) [A/m] | Power Density (S) [mW/Cm <sup>2</sup> ] | Averaging Time  E ^2,  H ^2 or S [minutes] |
| 0.3 - 3.0                                   | 614                               | 1.63                              | 100*                                    | 6                                          |
| 3.0 - 30                                    | 1842/f                            | 4.89/f                            | 900/f <sup>2</sup> *                    | 6                                          |
| 30 - 300                                    | 61.4                              | 0.163                             | 1                                       | 6                                          |
| 300 - 1,500                                 | -                                 | -                                 | f/300                                   | 6                                          |
| 1,500 - 100,000                             | -                                 | -                                 | 5                                       | 6                                          |

| Limits for General Population/Uncontrolled Exposure |                                   |                                   |                                         |                                            |
|-----------------------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------------|--------------------------------------------|
| Frequency Range [MHz]                               | Electric Field Strength (E) [V/m] | Magnetic Field Strength (H) [A/m] | Power Density (S) [mW/Cm <sup>2</sup> ] | Averaging Time  E ^2,  H ^2 or S [minutes] |
| 0.3 - 3.0                                           | 614                               | 1.63                              | 100*                                    | 30                                         |
| 3.0 - 30                                            | 842/f                             | 2.19/f                            | 180/f <sup>2</sup> *                    | 30                                         |
| 30 - 300                                            | 27.5                              | 0.073                             | 0.2                                     | 30                                         |
| 300 - 1,500                                         | -                                 | -                                 | f/1500                                  | 30                                         |
| 1,500 - 100,000                                     | -                                 | -                                 | 1                                       | 30                                         |

f = frequency




\*Plane-wave equivalent power density

The FCC states that “Occupational/ Controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for Occupational/ Controlled exposure also apply in situations when an individual is transient through a location where Occupational/ Controlled limits apply provided he or she is made aware of the potential for exposure.”

For General Population/ Uncontrolled limits, the FCC states that “General Population/ Uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not fully be aware of the potential for exposure or cannot exercise control over their exposure.”

For purposes of this analysis, all limits are evaluated against the Power Density limits.

Typical guidelines for determining whether Occupational/ Controlled limits can be applied include ensuring the environment (such as a rooftop) as limited/controlled access via locked doors or physical barrier that are preferably controlled by a landlord that is aware of the situation and can inform anyone going through the locked door of the existence of the RF emissions. Such notification/awareness is typically accomplished by means of signage on the door, or other access to the area of concern, as well as signage on or near the antennas. Examples of such signs include the following:

| GUIDELINES                                                                                                                        | NOTICE                                                                                 | CAUTION                                                                              | WARNING                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| This sign will inform anyone of the basic precautions to follow when entering an area with transmitting radiofrequency equipment. | This sign indicates that RF emissions may exceed the FCC General Population MPE limit. | This sign indicates that RF emissions may exceed the FCC Occupational MPE limit.     | This sign indicates that RF emissions may exceed at least 10x the FCC Occupational MPE limit. |
|                                                |     |  |          |

| NOC INFORMATION                                                                                                                                                                                                                      |                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Information signs are used as a means to provide contact information for any questions or concerns. They will include specific cell site identification information and the Verizon Wireless Network Operations Center phone number. |  |

Standards for when to use each of the above signs for Occupational situations are as follows:

**No sign required: <100% of Occupational MPE**  
**Blue Sign, Notice: 100% to <500% of MPE**  
**Yellow Sign, Caution: 500% to <5000% of MPE**  
**Red Sign, Warning: ≥5000% of MPE**

*All MPE references are to the FCC General Population limits.*

## **8 Appendix B: Overview of RoofMaster® Functions and Assumptions**

RoofMaster® is a RF Compliance software package designed to enable the analysis, assessment and mitigation of communications sites with respect to human exposure to radiofrequency electromagnetic fields.

RoofMaster® was developed in 2008 by Waterford Consultants to support compliance assessments performed at single and multi-operator wireless locations throughout North America and has been in service since 2008. Real-world experience in evaluating thousands of base station installations is reflected in the RoofMaster® design approach. This document provides a guide for creating simulations of RF hazard conditions through the characterization of antenna systems and site features and through FCC-specified computational analysis.

On any structure, one may encounter antennas installed by wireless service providers, public safety and other FCC-licensed and unlicensed operators. Siting constraints have resulted in diverse and complex environments accessible to people performing a variety of activities around these antennas. RoofMaster® supports the characterization of these locations to convey important information regarding RF sources and accessible areas necessary to evaluate the potential for human exposure to hazardous levels of RF energy.

RoofMaster® supports the depiction of communications sites through the display of construction drawing or aerial photography image files as well as providing line drawing tools. These representations are scalable to enable the modeling of any location.

RoofMaster® utilizes a three-dimensional spatial framework consisting of a 1000 x 1000 grid with unlimited vertical dimensions necessary for the positioning of antennas and modeling of RF conditions at each grid point throughout the space. Predictive analysis is performed on a study plane at a specified elevation. The subsequent sections of this guide provide the steps necessary to create a site representation and conduct these studies.

RoofMaster® employs several power density prediction models based on the computational approaches set forth in the Federal Communications Commission's Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, OET Bulletin 65. This guideline utilizes several antenna and operational parameters in calculating the power density contributions from each emitter at specified points throughout the study space. RoofMaster® enables antennas to be fully defined in site specific aspects as well as through the use of a library of manufacturer data. The parameters include:

- § Antenna model
- § Radiation patterns
- § Aperture length
- § Gain
- § Beamwidth
- § Antenna radiation center
- § Azimuth
- § Mechanical downtilt
- § Location
- § Frequency
- § Power into antenna

In OET-65, the Cylindrical Model is presented as an approach to determine the spatially averaged power density in the near field directly in front of an antenna. In order to implement this model in all directions, RoofMaster® utilizes the antenna manufacturer horizontal pattern data. Additionally, RoofMaster® incorporates factors that reduce the power density by the inverse square of horizontal and vertical distance beyond the near field region.


Power density is calculated as follows:

$$S = \left( \left( \frac{360}{\text{Beamwidth}} \right) \frac{P_{in} G_H H_r V_r}{2 \pi R h} \right) \frac{\mu W}{cm^2}$$

- S is the spatially averaged power density value
- R is the horizontal distance meters to the study point
- h is the aperture length in meters
- P<sub>in</sub> is power into the antenna input port in Watts

RoofMaster® Implementation:

- G<sub>H</sub> is gain offset to study point as specified in manufacturer horizontal pattern
- P<sub>in</sub> is adjusted by the portion of the antenna aperture in the 0-6 ft. vertical study zone
- H<sub>r</sub> accounts for 1/R<sup>2</sup> Far Field roll off which starts at 2\*h
- V<sub>r</sub> accounts for 1/ (vertical distance)<sup>2</sup> roll off from antenna bottom to the top of the 0-6 ft. study zone (or antenna top to bottom of 0-6 ft. study zone)

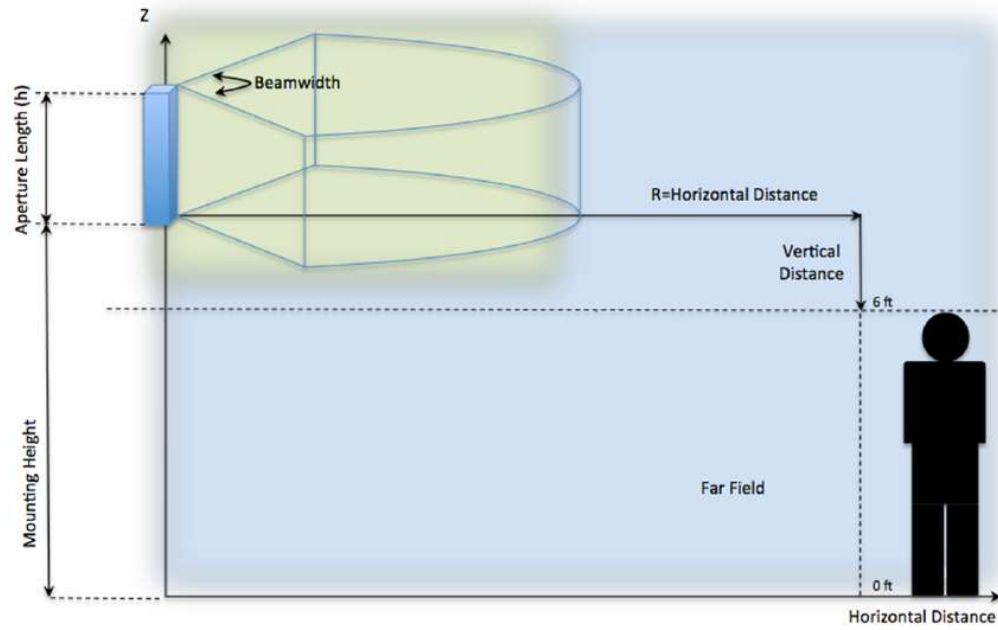

## 9 References

**FCC (1997).** “Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields”; Federal Communications Commission; Office of Engineering and Technology, OET Bulletin 65, Edition 97-01, August.

**Waterford Consultants, LLC (2008).** RoofMaster® User Guide, Waterford Consultants, LLC.

## **10 Limited Warranty**

Pramira, Inc. warrants that this analysis was performed in good faith using the methodologies and assumptions covered in this report and that data used for the analysis and report were obtained by Pramira, Inc. employees or representatives via site surveys or research of Verizon's available information. In the event that specific third-party details were not available, best efforts were made to use assumptions that are based on industry experience of various carriers' standards without violating any confidential information obtained under non-disclosure terms.

Pramira, Inc. also warrants that this analysis was performed in accordance with industry acceptable standards and methods.

There are no other warranties, express or implied, including but not limited to, the implied warranties of merchantability and fitness for a particular purpose, relating to this agreement or to the services rendered by Pramira hereunder. In no event shall Pramira be held liable to Verizon, or to any third party, for any indirect, special, incidental, or consequential damages, including but not limited to loss of profits, loss of data, loss of goodwill, and increased expenses. In no event shall Pramira be liable to Verizon for damages, whether based in contract, tort, negligence, strict liability, or otherwise, exceeding the amount payable hereunder for the services giving rise to such liability.