



Metro

Regional High Injury Corridors

Lake McTighe
Principal Planner, Metro

BPCAC
Feb. 8, 2023



Source: FHWA



First high injury corridors identified in 2017 using methodology determined by regional working group

High injury corridors are included in the *2018 Regional Transportation Plan* and *Regional Transportation Safety Strategy*




2018 Regional Transportation Plan

Regional Transportation Safety Strategy

A strategy to achieve Vision Zero in the greater Portland region

December 6, 2018


oregonmetro.gov/safety

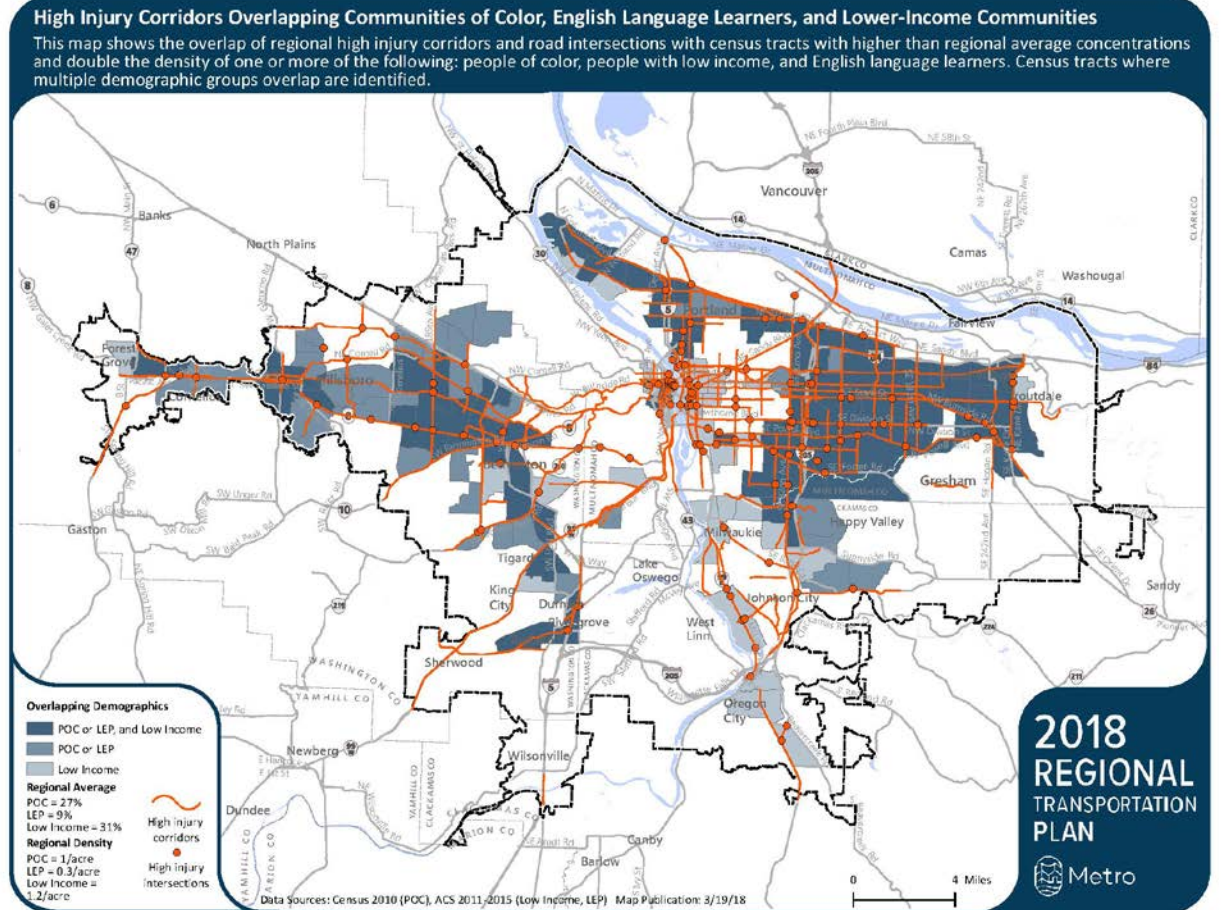

High injury corridors are roadways with the highest concentrations of serious crashes and injury pedestrian and bicycle crashes occur during a given time frame.

This map shows all corridors 1-5 miles long where serious crashes and all injury pedestrian and bicycle crashes occurred between 2016-2020.

Corridors where 60% of these crashes occur are shown in orange.

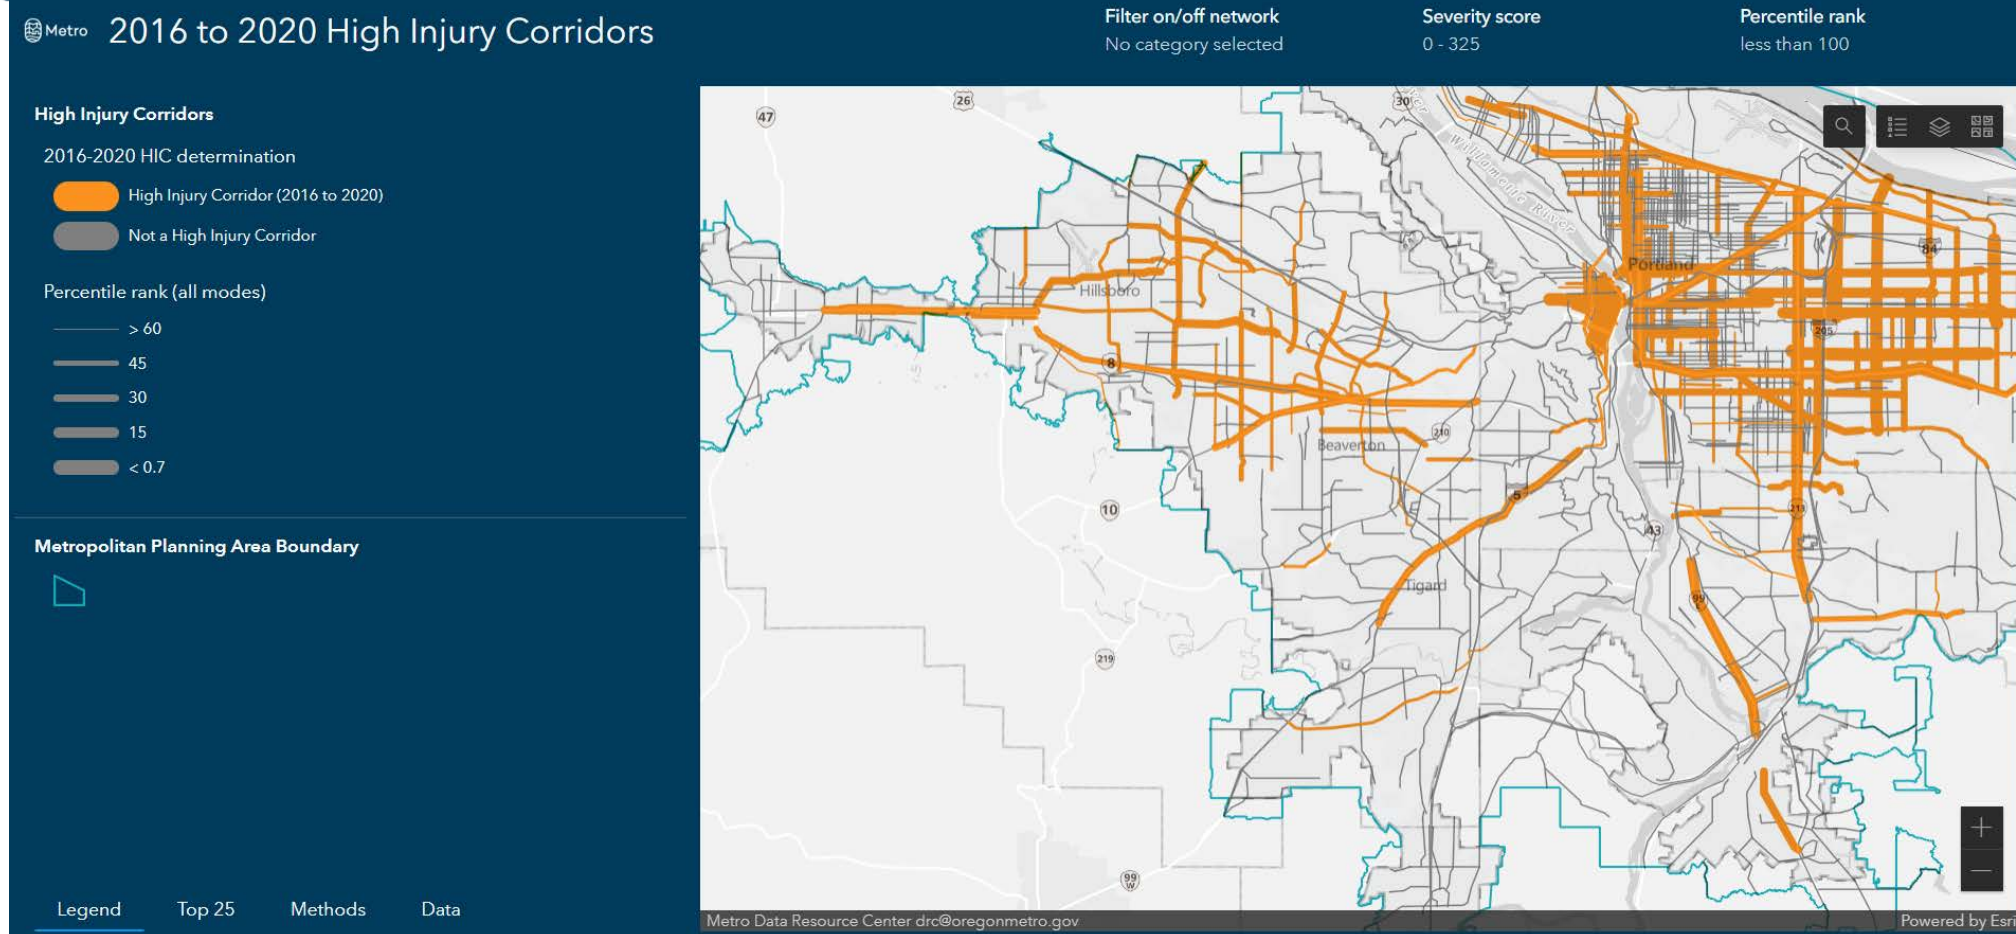


High Injury Corridors dashboard map: <https://gis.oregonmetro.gov/high-injury-corridors>

Why identify high injury corridors? Regional analysis found that a majority of serious crashes occurred on arterials – but which ones?

Figures 2-8 and 2-9


Serious Crashes by Roadway Class

Annual Fatal/Incapacitating Crashes, 2011 - 2015

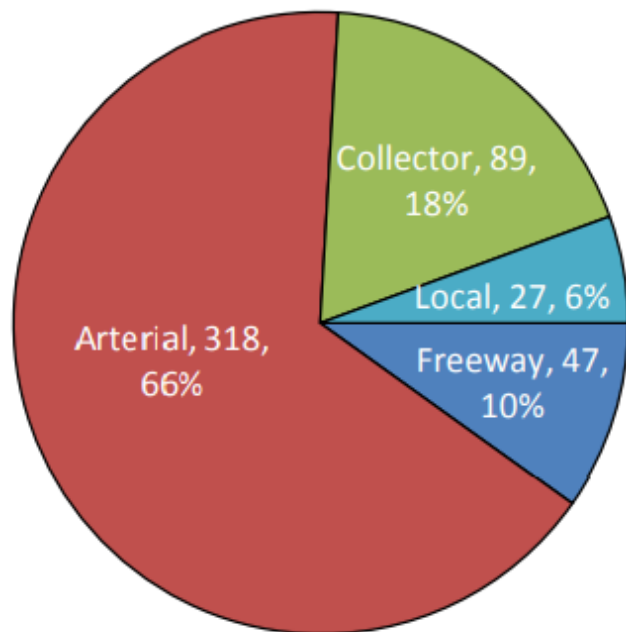

Serious Crash Rate by Roadway Class



Fatal/Incapacitating Crashes per VMT, 2011-2015

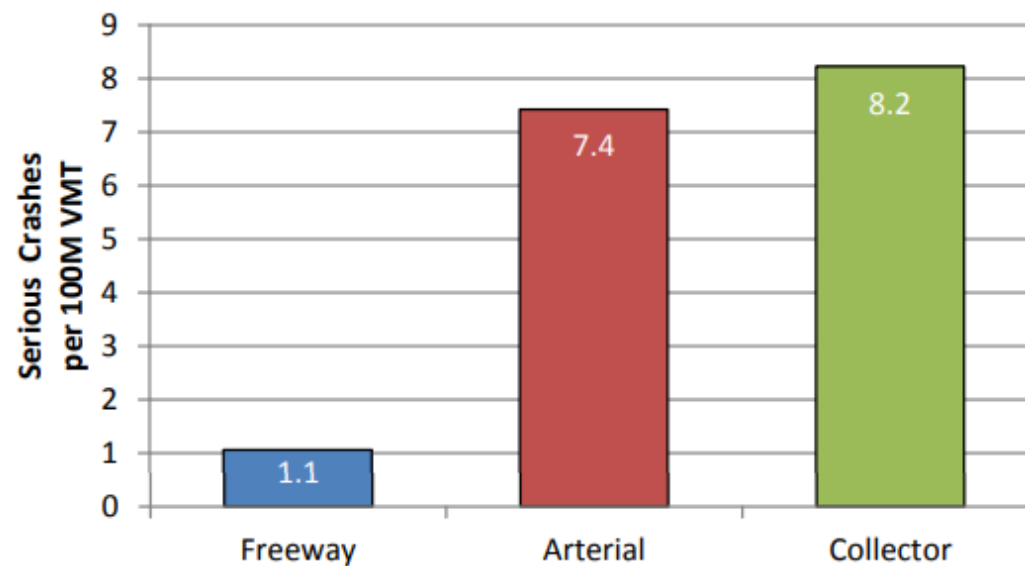

Regional analysis also found that a majority of serious crashes occurred on arterials with 4+ lanes– but which ones?

| Number of Arterial/Collector Lanes | Total Road-Miles | Annual VMT (2015) | 2011-2015 Annual Crashes | | |
|------------------------------------|------------------|-------------------|--------------------------|------------|---------|
| | | | All | All Injury | Serious |
| 1 – 3 Lanes | 1,427 | 2,972,000,000 | 8,932 | 4,217 | 198 |
| 4+ Lanes | 340 | 2,738,000,000 | 10,597 | 5,532 | 236 |

Figures 3-5 and 3-6

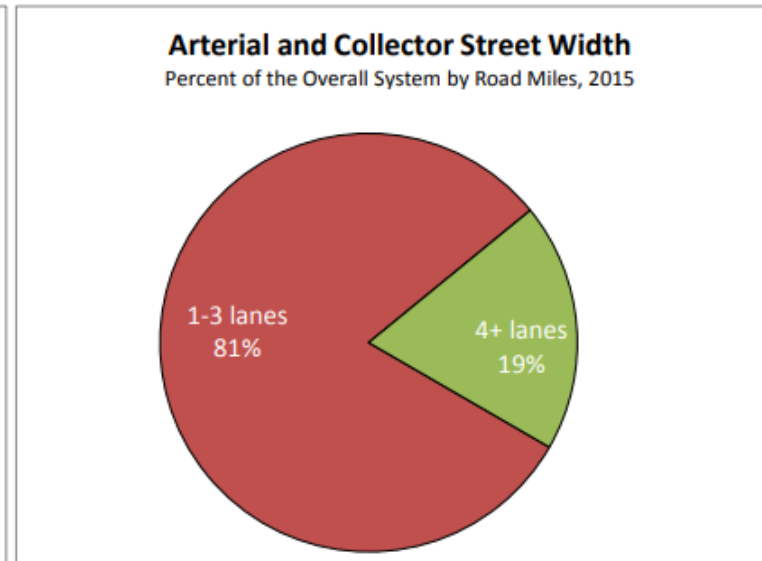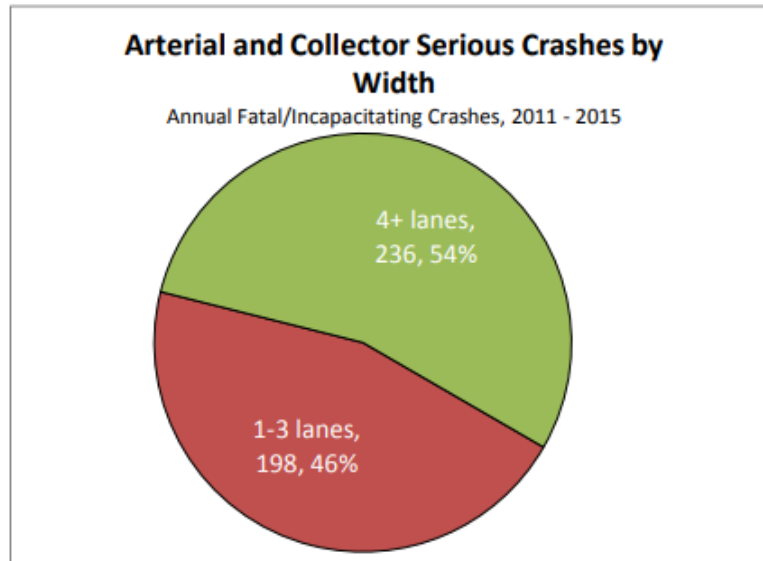


Regional analysis also found that a majority of serious pedestrian and bicycle crashes occurred on arterials– but which ones?

Figures 5-9 and 5-10


Serious Pedestrian Crashes by Roadway Class

Annual Fatal/Incapacitating Pedestrian Crashes, 2011 - 2015

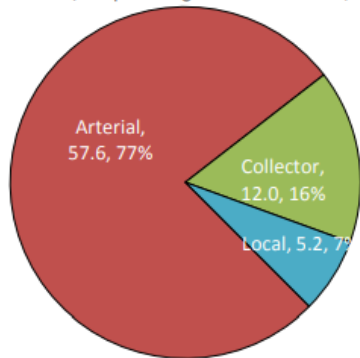

Serious Pedestrian Crash Rate by Roadway Class


Annual Fatal/Incapacitating crashes per road mile, 2011 - 2015

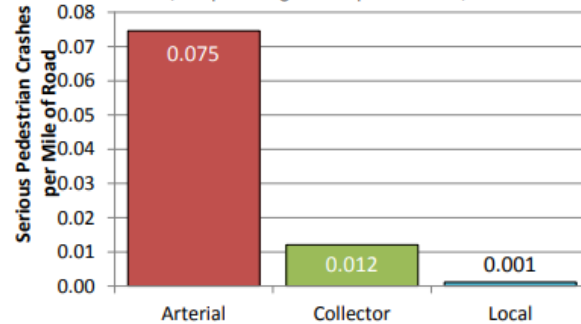

Figures 6-9 and 6-10


Serious Bicyclist Crashes by Roadway Class

Annual Fatal/Incapacitating Bicyclist Crashes, 2011 - 2015


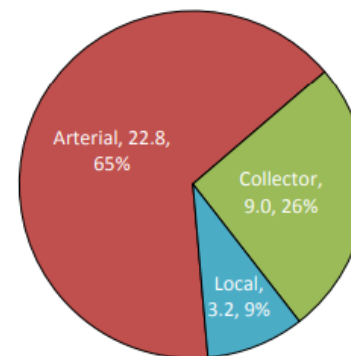


Serious Bicyclist Crash Rate by Roadway Class

Annual Fatal/Incapacitating Crashes per road mile, 2011 - 2015

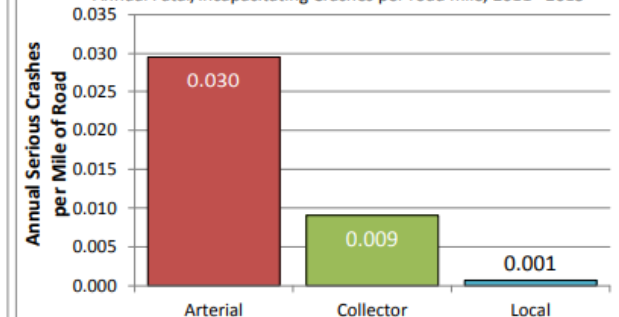

Identify high injury corridors to focus countermeasures where they can make the biggest impact on serious crashes and for vulnerable users

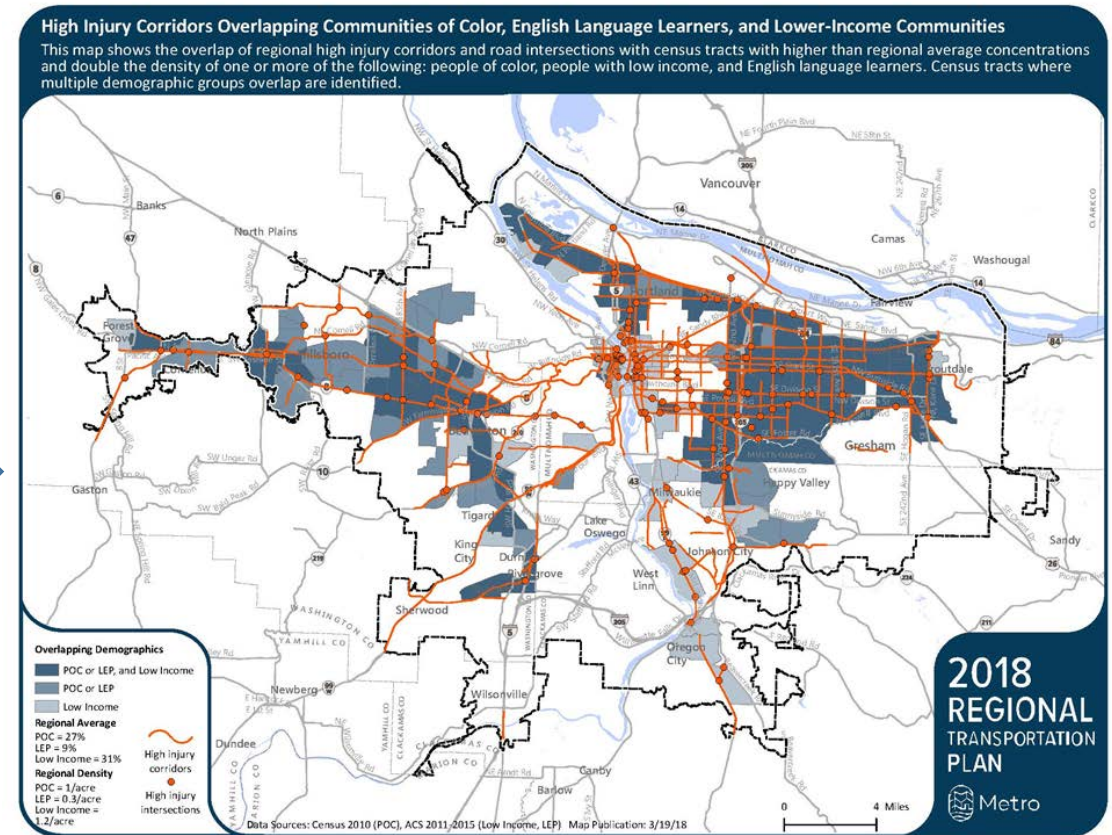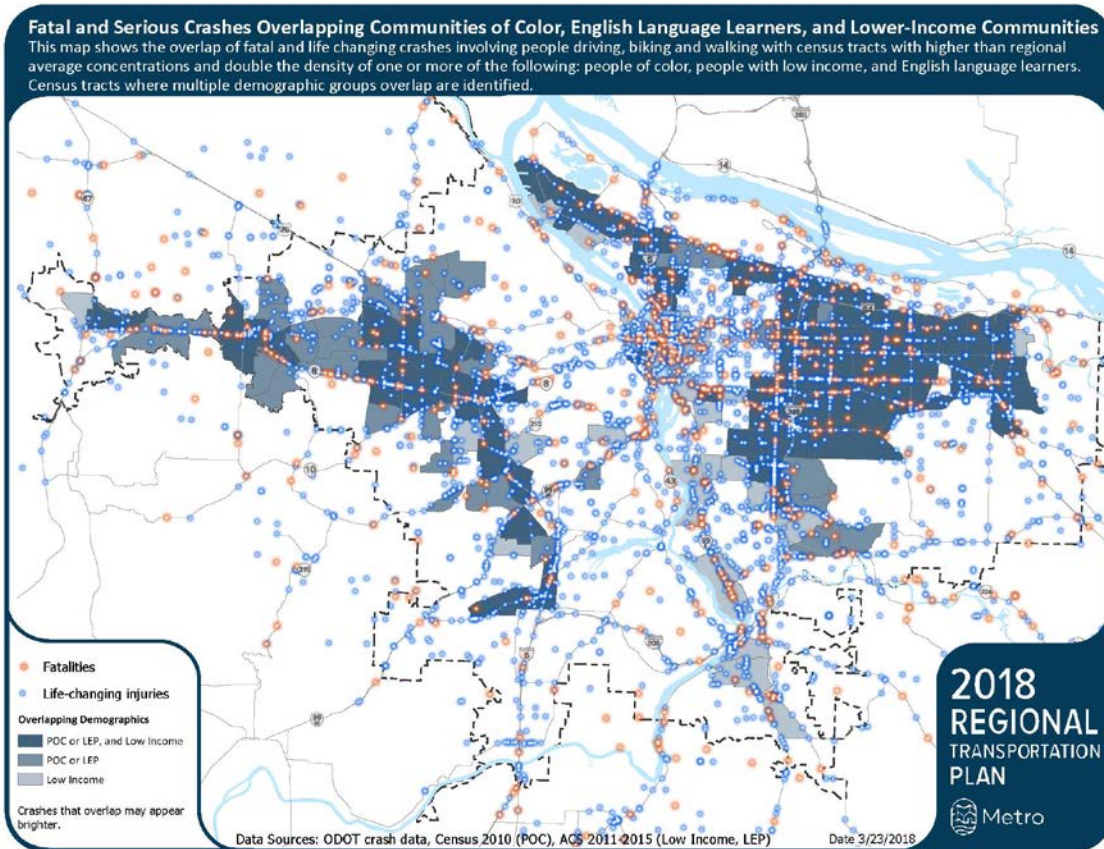


Total number of fatal and serious injury crashes


60% of fatal and serious injury crashes and all injury pedestrian and bicycle involved crashes

Why include all injury pedestrian and bicycle crashes in the analysis if the focus is on reducing serious crashes?


- People walking and bicycling are much more vulnerable to being killed or seriously injured in a crash
- If a person walking or bicycling is involved in a crash the difference between a serious or minor crash can often be just a few inches
- There are far fewer total pedestrian and bicycle crashes so can get “lost” in the data
- Local and regional goals and policies seek to increase the number of people walking, bicycling and taking transit

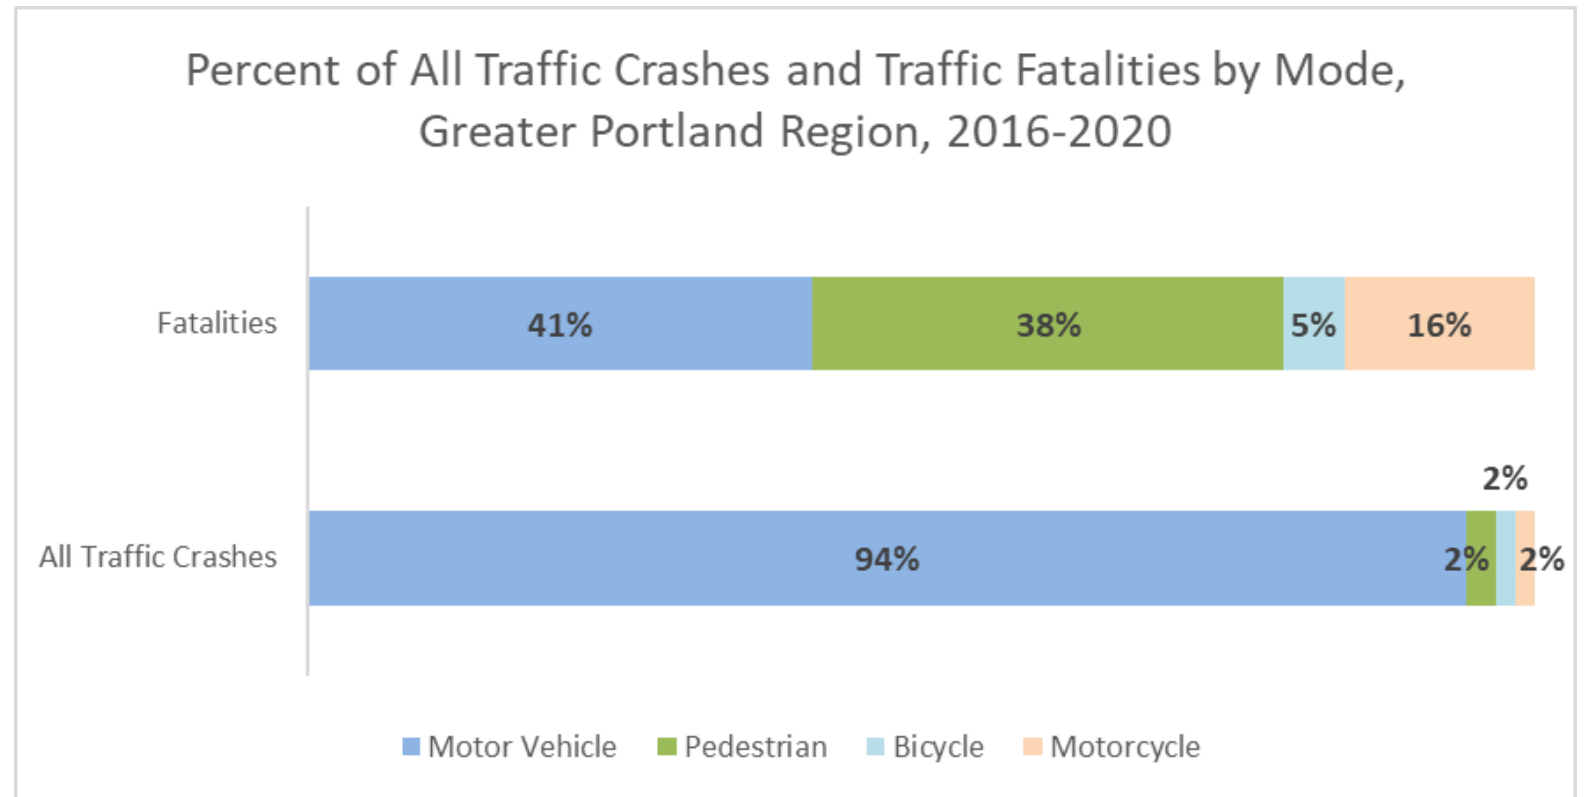

High injury corridors updated for the 2023 RTP with 2016-2020 crash data

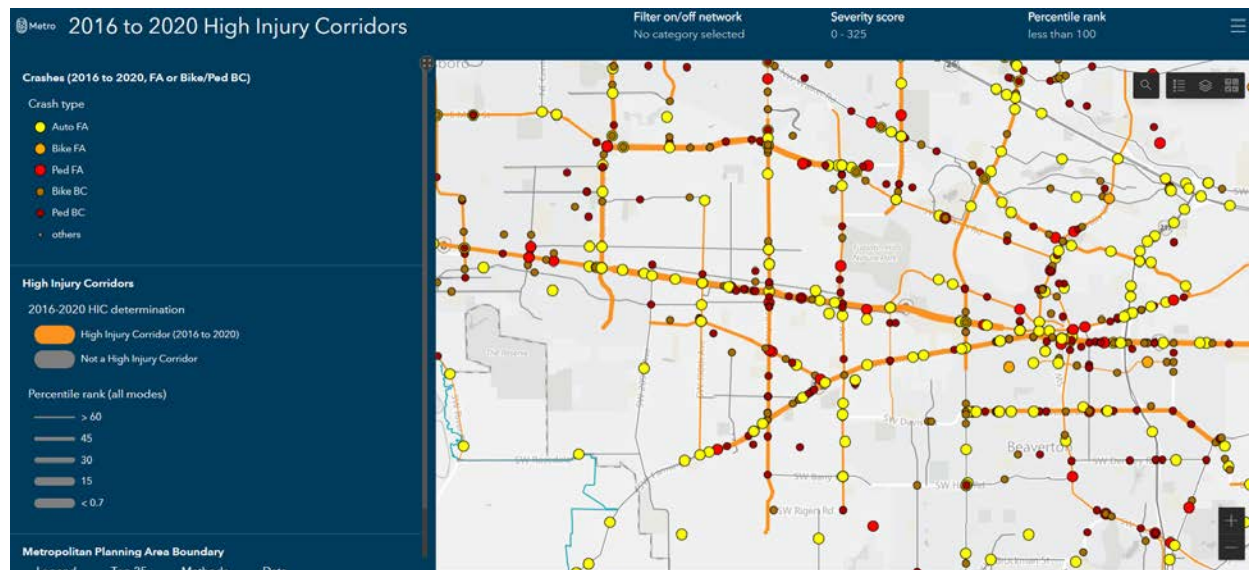

All fatal and serious injury crashes, and all injury pedestrians and bicycle crashes in 2016-2020 analyzed to identify roadways with 60% of fatal and serious crashes

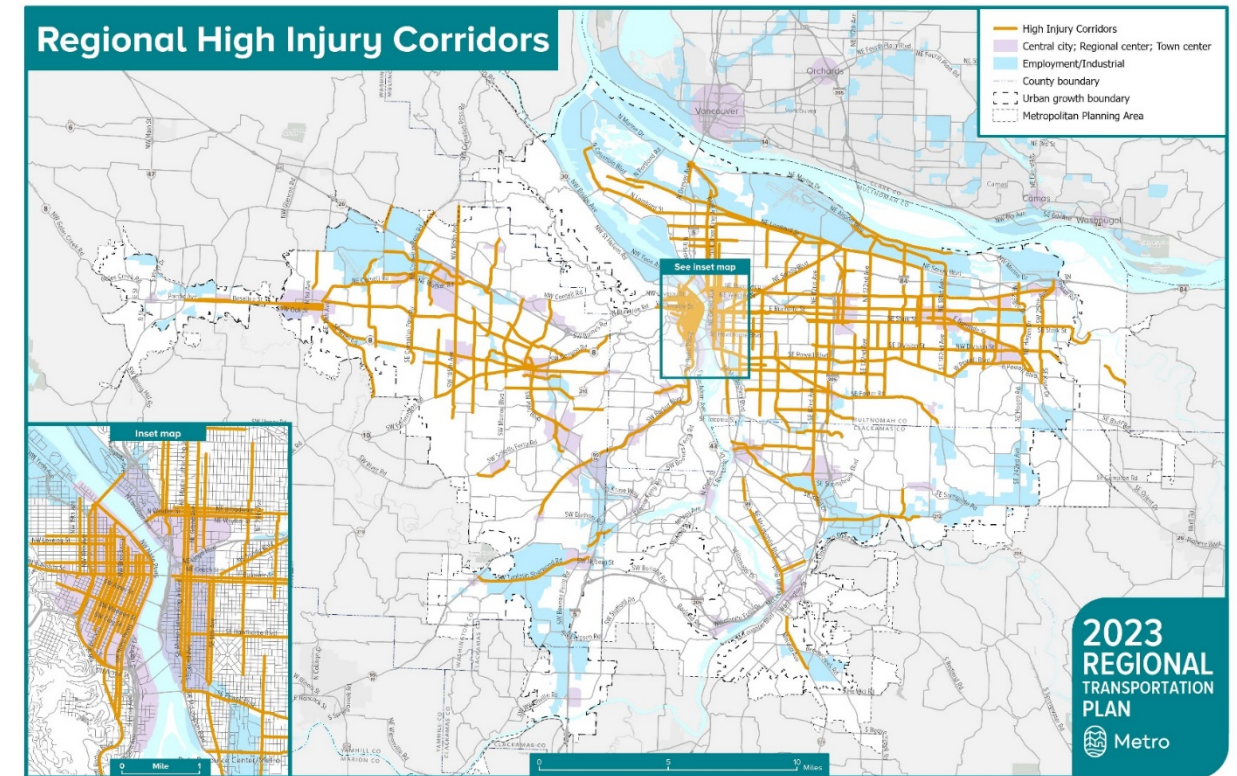

<https://gis.oregonmetro.gov/high-injury-corridors>



Metro

Thank you

Lake McTighe

lake.mctighe@oregonmetro.gov

www.oregonmetro.gov/regional-transportation-safety-plan




Methodology Part 1: Streets

Create dissolved corridors

Start with RLIS streets

Purpose: to create a standard name for the whole corridor, e.g. Hwy 8 (the dissolved corridor)

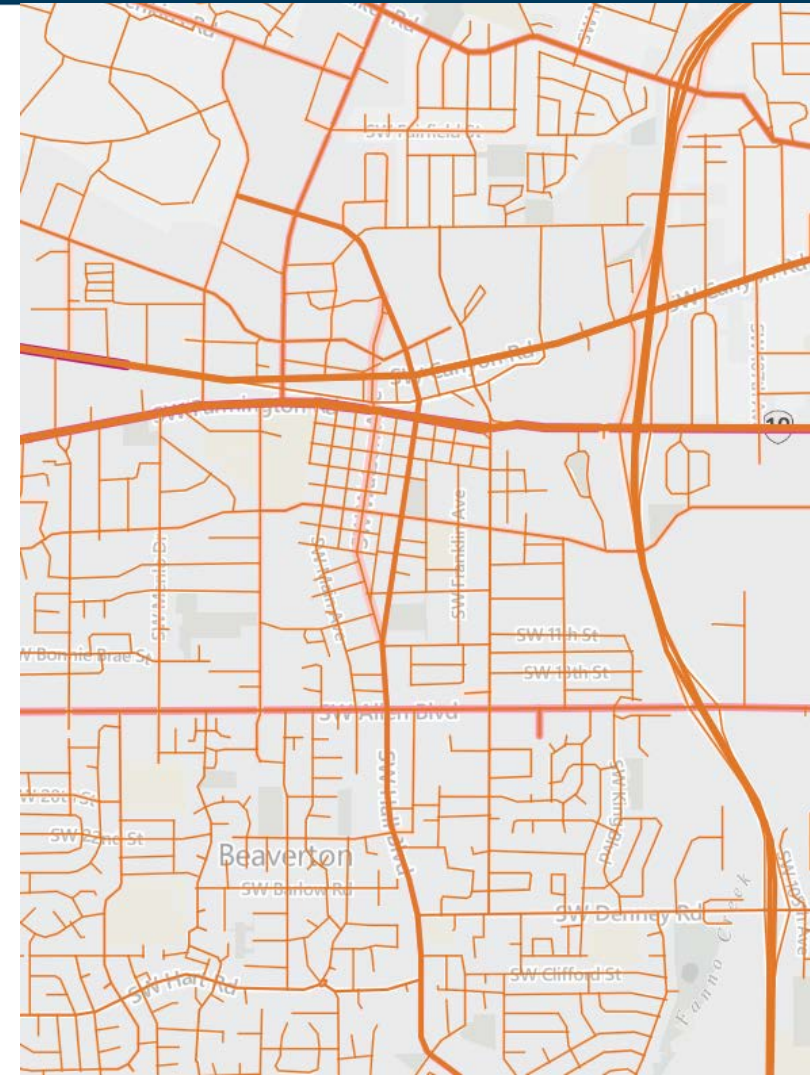


Methodology Part 1: Streets

Break “dissolved corridors” into corridors

Break the “dissolved corridors”, which are of varying lengths, into corridors no shorter than 1 mile, no longer than 5 miles


Purpose: Create corridors for scoring. Corridors are not defined by crashes, so that may be compared over time

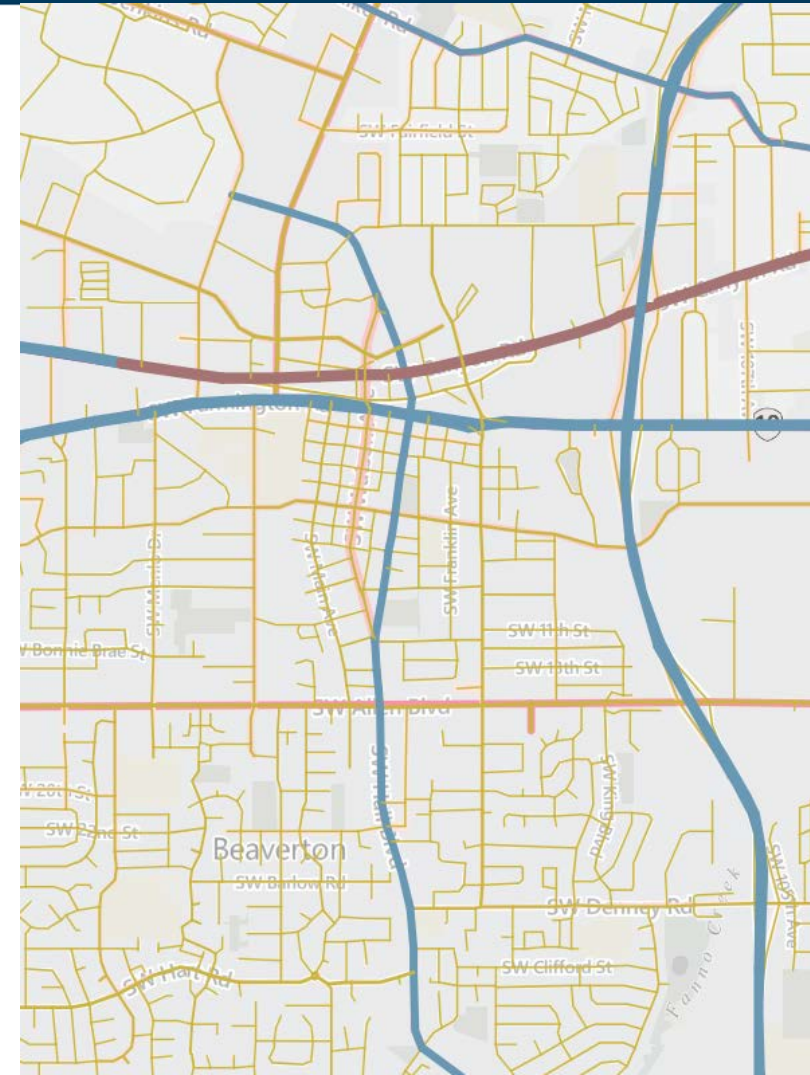

Methodology Part 1: Streets

Create intersections and segment midpoints


Purpose: Create intersections and midpoints in each corridor to 'snap' the crashes to

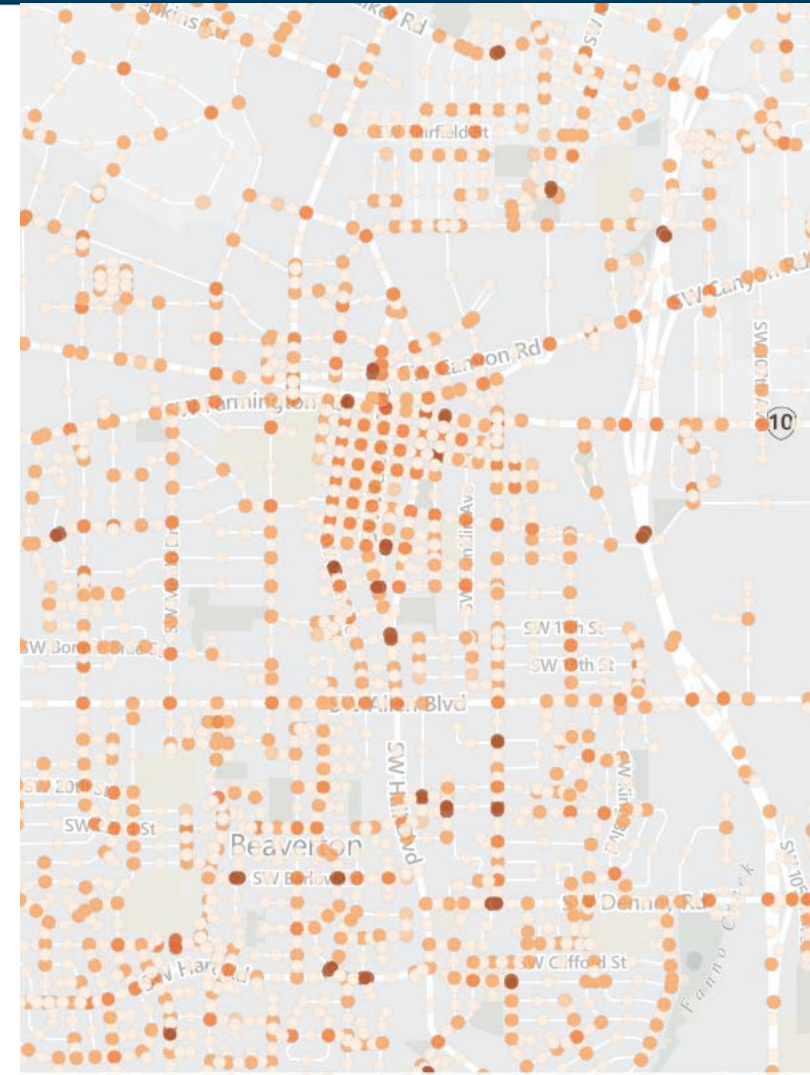

Methodology Part 2: Crashes

Snap crashes to intersections or midpoints

Purpose: Join the weighted crash types to the corridors; snap to either an intersection (for calculating high injury intersections) or a midpoint, depending on distance from intersection

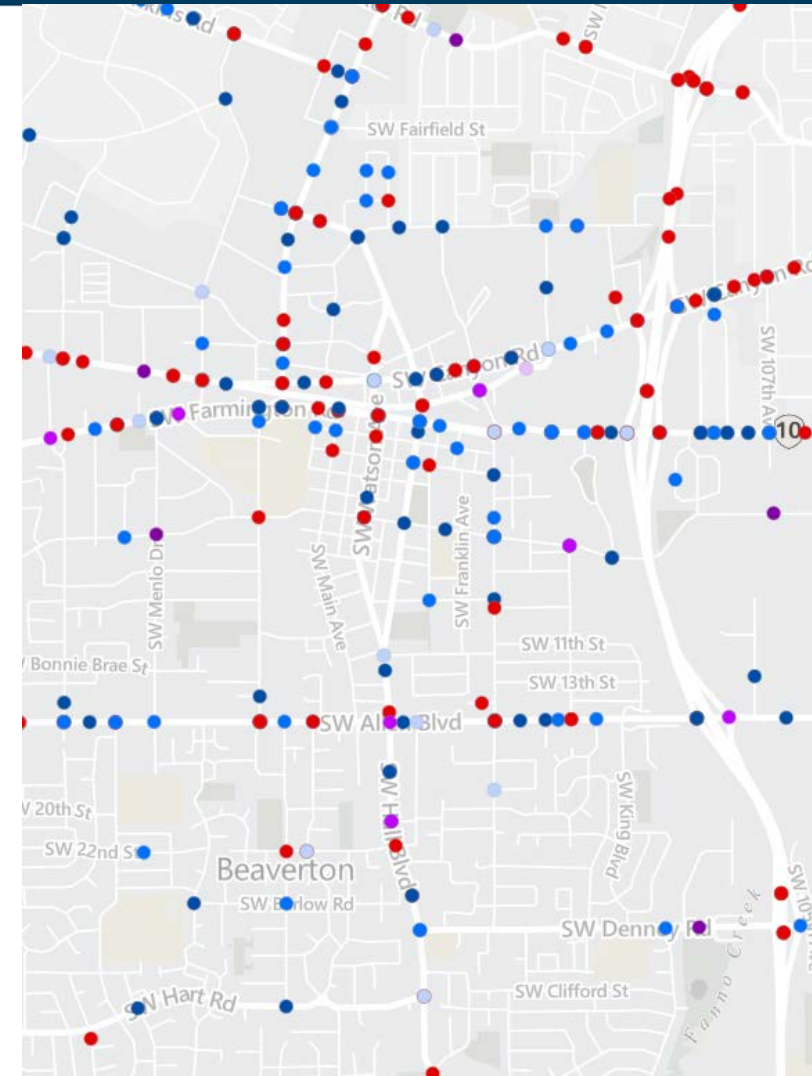

Methodology Part 3: Score Corridors


Calculate corridor scores

Purpose: Calculate nScore for each corridor as sum of crash types (frequency * weight)

$nScore = (\# \text{ FAx}10) + (\# \text{ Ped/Bike BCx}3)$

Calculate severity score for each corridor (score normalized by length of corridor)


Normalization (Severity score) = $nScore * 10,000 / \text{Length of corridor (feet)}$

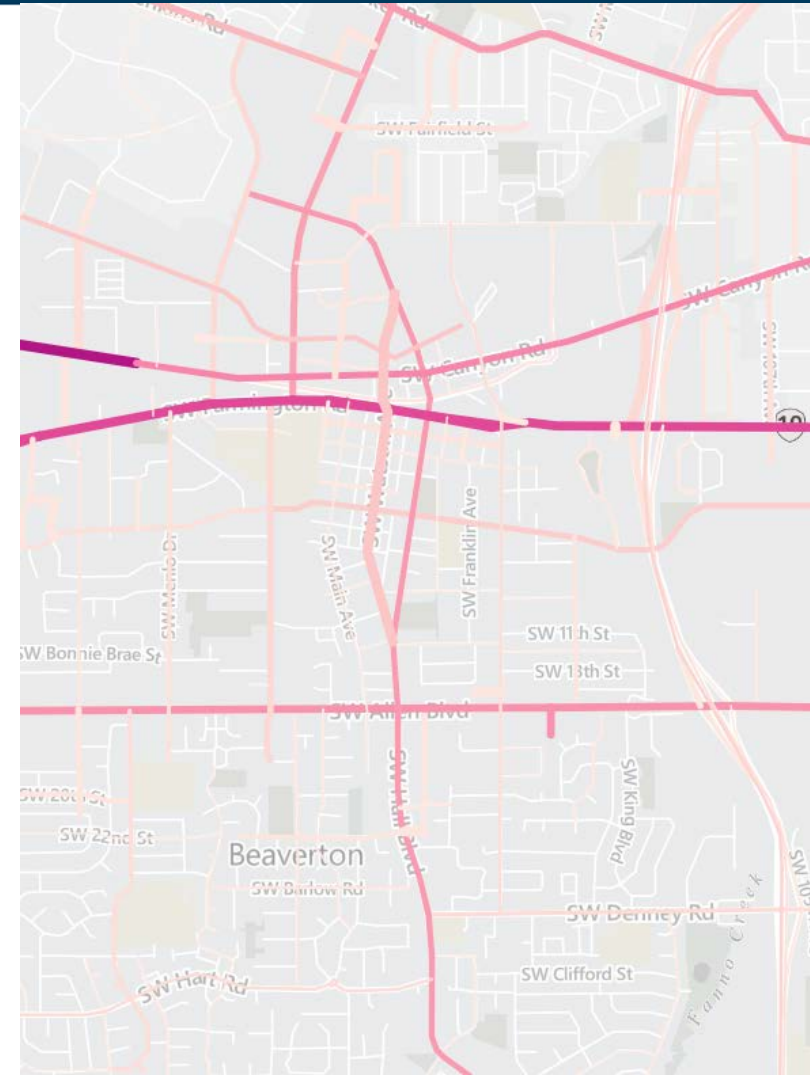


Methodology Part 3: Score Corridors

Calculate percentiles and rank corridors

Purpose: Identify the corridors where 60% of fatal and serious injury crashes are occurring; identify the corridors with the highest severity scores and lowest percentile rank

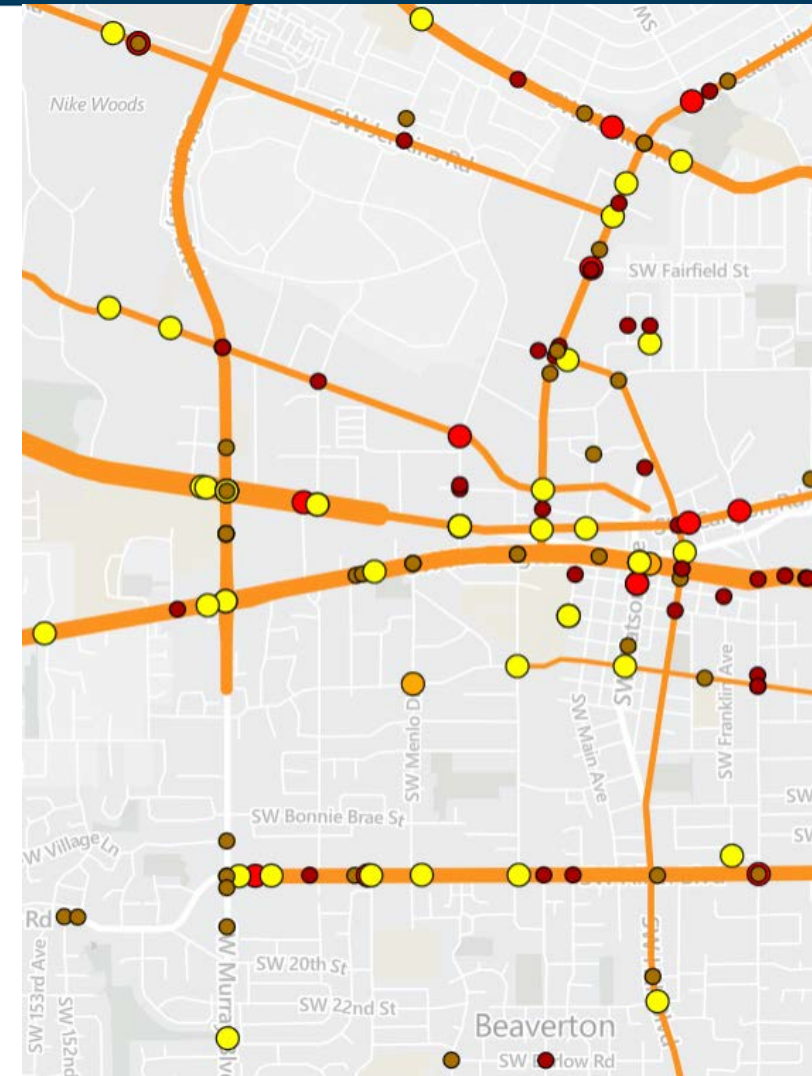


2016-2020 High Injury Corridors dashboard

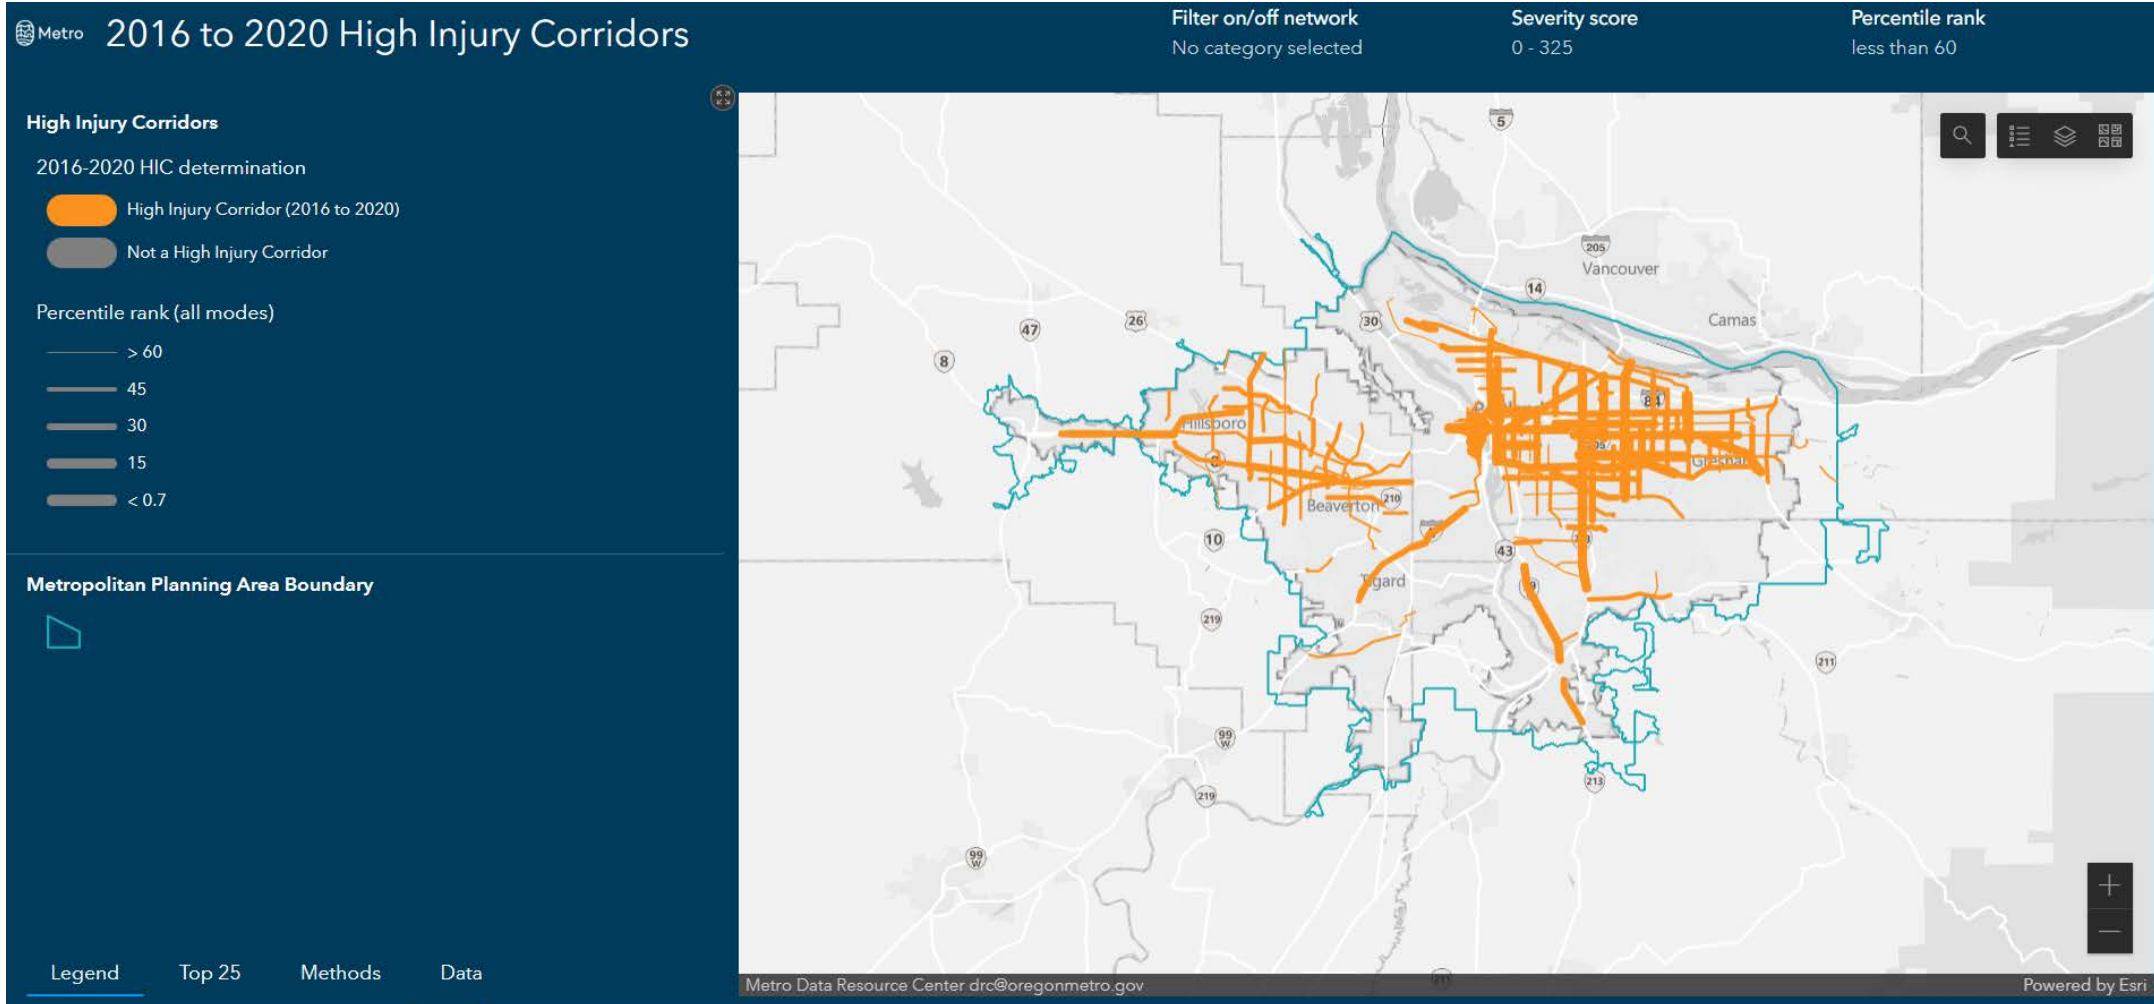

Comparison of HICs and SPIS sites

Two different approaches to help prioritize investments in safety

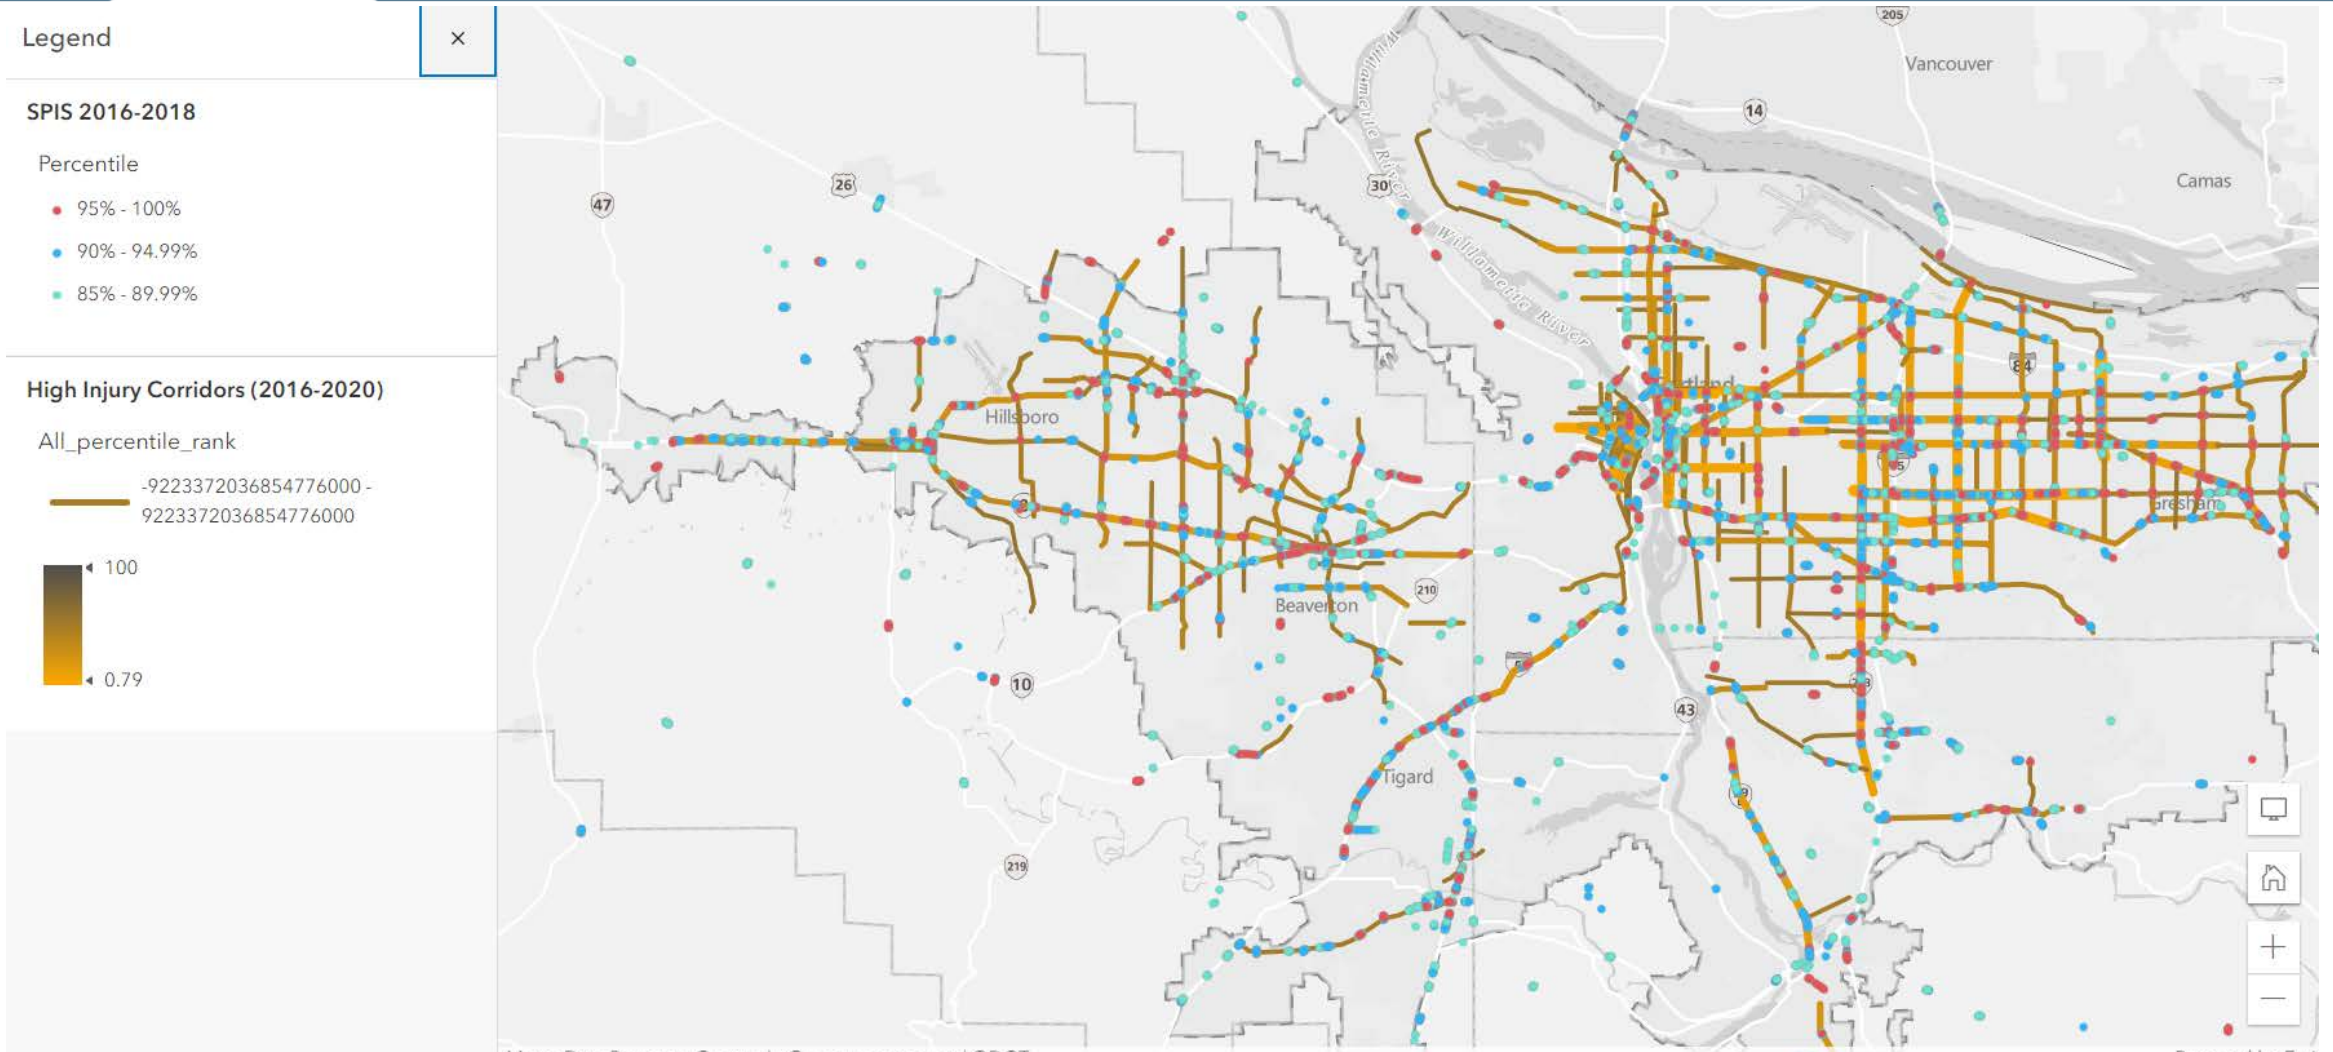



| Metro Regional High Injury Corridors (HICs) | Oregon Safety Priority Index System (SPIS) |
|--|--|
| Purpose: Identify roadway corridors where 60% of fatal and serious injury crashes are occurring | Purpose: Identify potential locations that have exhibited high instances of crash activity; SPIS sites are those with at least one fatal crash or three injury crashes |
| Data: ODOT crash data, Metro RLIS streets | Data: ODOT crash data, ODOT roadway |
| Time-period: 5-year window of data (e.g. 2016-2020) | Time-period: 3-year window of data (e.g. 2017-2019) |
| Type: Corridor | Type: Intersection |
| Compares all roadways within the Metropolitan Planning Area | Compares all roadways within the state (or county) |
| Segments analyzed: at least 1 mile, no longer than 5 miles | Segments analyzed: 0.10 mile segments “sliding window” (crashes may be assigned to more than one segment) |
| Crashes analyzed: All fatal and serious (Injury A) and all injury pedestrian and bicycle crashes (Injury B &C) | Crashes analyzed: All injury crashes |
| Weights applied to crashes (severity): <ul style="list-style-type: none">• Fatal & serious injury (Injury A): 10• Pedestrian/bicycle moderate injury (B & C): 3 | Weights applied to crashes (severity) (50% of SPIS score): <ul style="list-style-type: none">• Fatal and serious injury (injury A): 100• Moderate injury (Injury B & C): 10• Property Damage Only were included up until the 2018 SPIS with a weight of 1; they are no longer included |
| Frequency: Number of serious injury crashes per corridor segment during 5-year window | Frequency: Number of crashes per 0.10 mile segment during 3-year window (25% of SPIS score) |
| Normalization: Number of fatal/serious crashes per mile | Normalization: Number of crashes per 1 million ADT (25% of SPIS score) |
| HIC severity score = ((# Fx10) + (# Ped/Bike BCx3)(10,000 / Length (feet))); highest score is the highest score | SPIS score = (IV Freq + IV Rate + IV Severity); highest score is 100 |